Advanced Engineering Informatics 76 (2026) 104987

Contents lists available at ScienceDirect

Advanced Engineering Informatics

journal homepage: www.elsevier.com/locate/aei

Full length article

Dam defects ontology and knowledge graph construction from Multi-Source hazard data using large language models

Jianfeng Huang [a,b], Wenang Hou [a,b,c,*], Shichen Zhang [a,b], Zhenhan Du [a,b,d], Jiangshan Yin [a,b]

[a] Department of Dam Safety Management, Nanjing Hydraulic Research Institute, Nanjing 210029, China
[b] Key Laboratory of Reservoir and Dam Safety, Ministry of Water Resources, Nanjing Hydraulic Research Institute, Nanjing 210029, China
[c] College of Civil and Transportation Engineering, Hohai University, Nanjing 210024, China
[d] College of Water Resource and Hydropower, Sichuan University, Chengdu 610065, China

ARTICLE INFO

Keywords:
Dam engineering hazards
Large language models
Knowledge extraction
Fine-tuning
Knowledge graph

ABSTRACT

During dam operation, large volumes of information on dam defects are documented in various paper-based reports. This information is essential for effective dam safety management, yet its dispersed distribution and unstructured textual form make it difficult to transform into structured and reusable knowledge. Therefore, it is imperative to mine knowledge from these resources to construct a knowledge graph for effective utilization. This study presents the construction and application of such a graph by leveraging large language models (LLMs). A dam defects ontology (DDO) was designed to systematically model dam entity properties, spatial distribution, technical parameters, and safety hazards, with particular emphasis on detailed hierarchical knowledge modeling of engineering hazard forms and their components. To mitigate the "hallucination" problem of LLMs in the specialized domain of dam safety, a domain-adaptive Ontology-guided Hazard Classification Framework (OHCF) was developed. OHCF integrates four core modules—fine-tuning, temperature-perturbed voting, ontology-constraint consistency checking, and expert validation—to improve the accuracy of dam hazard entity recognition. In addition, OHCF dynamically expands the DDO through a semi-supervised mechanism. Experimental results show that all evaluation metrics of OHCF exceed 90 %. Based on the proposed method, this study mined dam safety evaluation reports for 22,076 defective and dangerous dams in China and constructed a dam defects knowledge graph (DDKG). Moreover, the proposed DDKG exhibits broad application potential in dam hazard risk analysis and in supporting expert decision-making for dam safety management.

1. Introduction

Reservoir and dam projects are globally important infrastructure, providing multiple functions such as flood control and disaster mitigation, water supply, agricultural irrigation, and hydropower generation. The safety of these projects is directly related to social stability. With the increase in operating years, dam projects commonly experience structural aging and functional degradation [1]. Coupled with the current frequent occurrence of natural disasters and intensified human activities, the safety situation of dams is continuously becoming more severe. Traditional risk analysis methods are mostly oriented toward individual projects and rely heavily on expert judgment or numerical computation [2–4]. Analyses of risk factors across multiple projects at regional scales remain limited. The emergence of data-driven methods has introduced new perspectives for risk assessment [5–7]. Using advanced knowledge engineering techniques, extensive amounts of dispersed hazard information can be structurally reorganized, enabling the identification of deep correlations. This provides a solid knowledge foundation for risk tracing and scientific decision-making.

At present, much of the critical key information related to dam defects is recorded in unstructured text [8]. These textual data are heterogeneous in format and poorly structured, making it difficult to effectively apply the embedded knowledge to correlation analysis and reasoning. This has led to the dilemma of being "rich in data but poor in knowledge," which constrains in-depth and systematic knowledge discovery of the mechanisms of dam defects and hazards.

Knowledge graphs (KGs) [9] offer an efficient tool for transforming this information into structured knowledge for organization and

* Corresponding author..
E-mail address: wahou@nhri.cn (W. Hou).

https://doi.org/10.1016/j.aei.2026.104987
Received 26 January 2026; Received in revised form 28 April 2026; Accepted 18 June 2026
Available online 22 June 2026
1474-0346/© 2026 Elsevier Ltd. All rights are reserved, including those for text and data mining, AI training, and similar technologies.

메모 (p.1)

1 연구 목적
- 댐 위험 리스크 분석과 댐 안전관리를 위한 전문가 의사결정 지원

2 연구 배경
- 운영연수가 늘어남에따라 댐은 구조적 노후화와 기능 저하를 겪는다
- 자연재해와 인간활동 강화로 댐 안전 상황은 더욱 심각해지고 있다
- 전통적인 리스크 분석 방법은 개별 댐을 대상으로 하며, 전문가 판단이나 수치 계산에 크게 의존한다
- 지역 규모에서 여러 댐에 걸친 리스크 요인 분석은 여전히 제한적이다
- 현재 댐 결함과 관련된 핵심 정보의 상당 부분은 비정형 텍스트로 기록되어 있고 구조화가 잘 되어 있지 않아, 지식을 상관 분석과 추론에 효과적으로 적용하기 어렵다.
- 지식그래프는 이러한 정보 조직과 구조화된 지식으로 변환하는 효율적인 도구를 제공한다.

analysis. They can reveal complex semantic relationships among entities and provide a feasible solution to the above problem. Constructing KGs from large volumes of engineering text relies on effective knowledge extraction. In this regard, deep learning-based natural language processing has made significant progress [10]. In particular, recent advances in large language models (LLMs) have created new opportunities for large-scale knowledge extraction from massive text corpora [11,12]. LLMs exhibit strong capabilities in contextual understanding and reasoning, and can perform tasks by following natural language instructions[13–16].

However, when applied to the specialized domain of dam engineering, LLMs face combined challenges related to domain adaptability, knowledge complexity, and application economics [17]. General-purpose models lack a deep understanding of specialized dam engineering knowledge, which hinders accurate mapping of domain-specific terminology and parsing complex hierarchical relationships, often resulting in factual errors. Moreover, applying large-scale models for dataset processing incurs high computational costs, limiting their efficiency and scalability in practical engineering applications.

To address these challenges, this study develops a dam defects ontology (DDO) to provide a structured representation framework for dam hazard knowledge. An Ontology-guided Hazard Classification Framework (OHCF) is further proposed, which leverages LLMs to standardize the classification of unstructured hazard descriptions. Based on this process, a dam defects knowledge graph (DDKG) is constructed to achieve the structured integration of hazard information across multiple dam projects, thereby supporting dam safety management.

The remainder of this paper is organized as follows. Section 2 reviews related work. Section 3 details the proposed methodology. Section 4 evaluates model performance and presents case studies using the KG. Section 5 concludes the study and outlines future research directions.

2. Related works

2.1. Knowledge representation in hydraulic engineering

With the deepening application of digital twin technology in the hydraulic sector, the efficient organization and utilization of massive information throughout the entire engineering lifecycle have become a pivotal challenge for the industry's intelligent advancement. Consequently, numerous studies have focused on developing specialized ontologies to represent relevant data and requirements in a structured manner.

As an explicit and formal specification of a shared conceptualization [18], an ontology serves as a fundamental pillar of the Semantic Web infrastructure and plays a critical role in the construction of knowledge graphs [19]. In the engineering domain, ontologies are introduced to model specialized knowledge and provide a robust organizational framework for domain-specific data. Given the inherent complexity of ontology construction, evaluating and reusing existing domain ontologies has become a crucial preliminary step for researchers embarking on new projects.

To date, various ontologies tailored for hydraulic engineering safety have been developed. Zhang et al. [20] constructed a knowledge ontology for hydraulic engineering safety management centered on the causes of engineering hazards and corresponding countermeasures, providing a structured knowledge model to enhance decision-making in risk management. Gan et al. [21] developed a multi-layered, ontology-driven KG framework for the resilience enhancement of underground structures, integrating resilience quantification and disaster chain analysis to bridge the gap between subjective experience and intelligent decision-making. Utilizing unstructured data—including risk prevention manuals and design schemes from the Middle Route of the South-to-North Water Diversion Project—Liu et al. [22] developed an emergency plan ontology, which provides key support for the intelligent generation and reuse of emergency strategies. Focusing on the four dimensions of "structure-process-environment-material," Zhou et al. [23] proposed a unified knowledge management framework by bridging Building Information Modeling and domain ontologies to address the fragmentation of heterogeneous monitoring data, enabling efficient knowledge extraction and semantic integration in dam safety systems. Furthermore, Baudrit et al. [24] developed a holistic, graph-based knowledge model for dam systems by utilizing the formalism of conceptual graphs to unify heterogeneous, cross-disciplinary knowledge flux, providing a convenient framework for capitalizing experience, predicting structural states, and supporting forensic civil engineering.

While the aforementioned studies all aim to enhance the operation and maintenance of hydraulic engineering, they vary significantly in their representation granularity and thematic focus. In general, existing research still falls short in characterizing the specific manifestations of defects and the intricate relationships between relevant influencing factors. This limitation hinders the capacity of current models to support fine-grained analysis and advanced reasoning within the domain of dam safety.

2.2. Construction of knowledge graphs

In 2012, Google introduced the concept of the KGs [25], which has since been extensively researched and applied across various domains [26–29]. KG is a structured semantic network that depicts real-world knowledge through "entity-relation-entity" triplets. While an ontology serves as the conceptual framework defining the schema layer of knowledge, KG represents the knowledge base instantiated by real-world data within this framework.

A key step in constructing the KG data layer is the extraction of domain entities from unstructured text, which is commonly formulated as a Named Entity Recognition (NER) task in Natural Language Processing (NLP). NER aims to identify entity mentions in text and assign them predefined entity type labels. Early NER methods typically relied on complex manually crafted rules [30–32]. With the rise of deep learning, NER systems achieved substantial performance improvements by automatically learning textual feature representations. Recurrent Neural Networks [33,34] and Convolutional Neural Networks [35–37] were initially used to encode contextual information. Subsequently, the Transformer [38] architecture, built on self-attention mechanisms, led to the development of Pre-trained Language Models (PLMs) such as BERT [39]. Through supervised fine-tuning on labeled datasets, PLM-based methods have demonstrated strong performance in various NER tasks [40–42]. However, such methods usually depend on substantial high-quality annotated data and well-defined label systems [43]. When these label systems are constrained by limited expert knowledge, the resulting models may struggle to generalize to domain-specific concepts that are weakly represented, ambiguously defined, or absent from the predefined schema.

Recently, the application of LLMs in NER has gained widespread attention [44]. Having undergone deep pre-training on massive and diverse unlabeled data, LLMs possess robust generalization capabilities and extensive linguistic knowledge. In downstream tasks like NER, LLMs can achieve superior performance guided solely by natural language instructions. Numerous studies have utilized LLMs to assist in KG construction [45–49]. Mainstream methodologies typically rely on meticulously designed structured prompts, combining few-shot examples with the target text to guide the model in generating standardized outputs for extracting entities, attributes, and relationships. Furthermore, research has demonstrated that LLMs can effectively assist in the construction and expansion of ontology models [50,51]. Nevertheless, the direct application of LLMs in specialized domains such as hydraulic engineering remains challenging. This is primarily due to the distribution shift between the training data and domain-specific contexts, resulting in insufficient mastery of specialized terminology and domain knowledge [52]. To enhance the utility of models in specific fields, recent studies have introduced strategies such as Parameter-Efficient

메모 (p.2)

1 한계와 해결방안
- 지식 추출과 관련하여 딥러닝 기반 자연어 처리 및 LLM의 발전은 상당한 진전과 지식을 추출할 새로운 기회를 만들었다
- 하지만 댐 공학이라는 전문 분야에서의 LLM은 도메인 적응성, 지식의 복잡성, 적용의 경제성과 관련된 어려움이 있다
- 범용 모델은 댐 공학 전문 지식이 부족하여 어려움이 있다
- 이러한 문제를 해결하기 위해 댐 결함 온톨로지(DDO) 개발한다
- 나아가 LLM을 활용하여 온톨로지 기반 위험 분류 프레임워크(OHCF)를 제안한다
- 이 과정을 바탕으로 댐 결함 지식그래프(DDKG)를 구축하여 댐에 걸친 위험 정보를 구조적으로 통합하고 이를 통해 댐 안전관리를 지원한다.

2 기존 연구들의 한계
- 모두 수리공학의 운영과 유지관리를 향상시키는 것을 목표로 함
- 하지만 표현의 세밀도와 주제 초점에서 각기 다르다
- 일반적으로 기존 연구는 결함의 구체적인 양상과 관련 영향 요인 사이의 복잡한 관계를 특성화 하는데 부족하다
- 이러한 한계는 현재 모델이 댐 안전 분야에서 세밀한 분석과 고급 추론을 지원하는 능력을 저해한다

3 온톨로지와 지식그래프(KG) 개념
- KG는 '개체-관계-개체' 삼항으로 현실 세계의 지식을 묘사하는 구조화된 의미 네트워크이다
- 온톨로지가 지식의 스키마 계층을 정의하는 개념적 틀이라면, KG는 이 틀 안에서 현실 세계의 데이터로 인스턴스화된 지식 베이스이다

4 개체 추출의 발전 과정 및 한계
- KG를 만들려면 비정형 텍스트(글)에서 대상을 찾아 미리 정해 둔 종류(라벨)를 붙여야 한다.
- 이 작업을 개체명 인식(NER)이라 한다
- 개체명 인식 방법은 다음과 같이 발전했다
1. 사람이 규칙을 정해서 쓰는 방식
2. 규칙을 사람이 정하지 않고, 컴퓨터가 글의 특징을 스스로 배우는 딥러닝 방식
3. 미리 언어를 익힌 모델(BERT 등)에 정답 예시로 추가 학습시키는 방식
- 3번의 한계: 사람이 정답 예시를 많이 만들어야 하고, 정해 둔 종류 목록에 없거나 예시가 적은 개념은 잘 찾지 못한다.
- LLM은 추가 학습 없이 지시문(+ 예시 몇 개)만으로 대상을 찾을 수 있어, KG 구축과 온톨로지 확장에 쓰이고 있다.
- 하지만 학습한 글이 대부분 일반 글이라 수리공학 같은 전문 분야의 용어와 지식을 잘 모른다.
- 그래서 최근에는 모델의 일부만 가볍게 추가 학습시키거나(PEFT), 단계별로 생각하게 시키는(CoT) 방법으로 출력 형식과 복잡한 의미 파악을 보완한다.
- 그래도 LLM은 환각 때문에 종류를 틀리거나 임의로 붙일 수 있어, 추출 결과를 믿기 어렵다. (→ 2.3에서 이 문제를 풀기 위해 OHCF를 제안)

Fine-Tuning [53] and Chain-of-Thought [54], effectively improving the structural regularity of model outputs and the ability to capture complex semantics.

In summary, while LLMs offer new possibilities for NER, their inherent hallucination issues may lead to the incorrect or arbitrary assignment of entity labels, thereby compromising the reliability of extraction results and hindering the structured organization and integration of knowledge.

2.3. Knowledge gap

The above studies show growing interest in building hydraulic engineering knowledge systems to support intelligent safety management and in using large language models for domain-specific knowledge processing. However, several research gaps remain. First, although existing studies in hydraulic engineering have laid a solid foundation for ontology construction, they are still insufficient for the fine-grained representation of dam defects, particularly in modeling hazard forms and affected components. Second, existing knowledge extraction methods based on PLMs, such as BERT, remain insufficiently flexible for dam engineering texts. Hazard descriptions in such texts are often fragmented, nested, and expressed in diverse ways, which increases the difficulty of knowledge extraction. Although these methods have shown good performance in classification tasks with a small number of labels, they usually require substantially more annotated data when applied to tasks involving larger label sets and more complex class relationships. In addition, these models are typically constrained by predefined categories derived from expert knowledge, making it difficult to identify previously undefined concepts. Third, although large language models have shown strong potential in NER tasks, their direct application to dam safety scenarios is still limited by insufficient domain knowledge, which often leads to significant hallucination problems.

To address these gaps, this study develops a fine-grained dam defect ontology and proposes OHCF to support ontology-guided hazard knowledge recognition and ontology expansion for dam defect knowledge graph construction.

3. Methodology

This section describes the implementation of ontology construction, data layer development, and KG storage. Fig. 1 illustrates the overall construction framework of the DDKG, which comprises three main components: DDO construction, knowledge extraction, and knowledge fusion.

3.1. DDO construction

An ontology is a standardized representation of concepts, entities, attributes, and their semantic relationships within a specific domain. In the construction of KGs, the ontology layer serves as the core structural backbone. The clarity and completeness of its design directly determine its knowledge coverage and representational accuracy of the KG [55]. In dam engineering, developing a structured and standardized ontology for defects is essential for unifying hazard terminology, enabling correlation analysis of complex causative mechanisms, and supporting downstream applications such as intelligent diagnosis and decision-making.

In this study, a seven-step methodology is adopted to construct the DDO. The process comprises the following steps: (1) defining the dam hazard domain ontology and related tasks; (2) considering the reuse of existing ontology models related to dam hazards; (3) enumerating relevant terminology; (4) defining ontology classes and hierarchical structures; (5) defining class attributes and relationships; (6) specifying constraints; and (7) creating instances.

The DDO is constructed using the Web Ontology Language (OWL) and is stored and managed with the Protégé tool. OWL is an ontology language recommended by the World Wide Web Consortium (W3C) for defining vocabularies and describing resources. By specifying classes, properties, and values, OWL provides a standardized method for users to

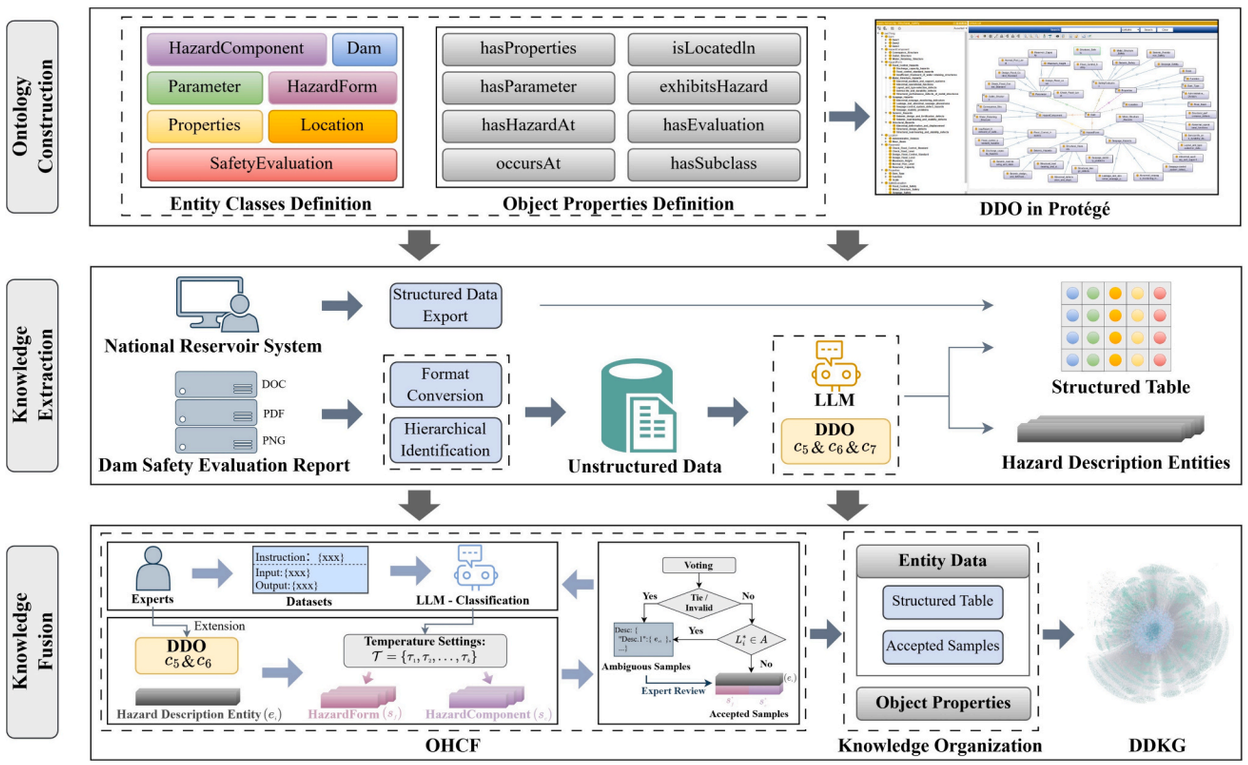


Fig. 1. Construction framework of DDKG.

메모 (p.3)

2.3 지식 공백 [차이]

1 기존 연구의 공백 3가지

1. 수리공학 온톨로지 연구는 있지만, 댐 결함을 세밀하게 표현하지 못한다. 특히 위험 형태(어떤 결함인지)와 위험 부위(어디에서 생겼는지)를 나타내는 부분이 부족하다.
2. BERT 같은 기존 추출 방법은 댐 보고서 글에 잘 맞지 않는다.
   - 보고서의 위험 서술은 문장이 조각나 있고, 한 문장에 여러 위험이 겹쳐 있으며, 같은 내용도 여러 방식으로 쓴다.
   - 종류(라벨)가 적을 때는 잘하지만, 종류가 많고 종류 사이 관계가 복잡하면 정답 예시가 훨씬 많이 필요하다.
   - 전문가가 미리 정한 종류에 묶여 있어, 처음 보는 개념은 찾지 못한다.
3. LLM은 개체 추출에 가능성이 크지만, 댐 안전 분야 지식이 부족해 환각(그럴듯하지만 틀린 답)이 심하다.

2 이 연구의 해결 방향 [목표]

- 댐 결함을 세밀하게 표현하는 온톨로지(DDO)를 만든다.
- 온톨로지를 기준으로 위험 지식을 인식하고, 새 개념이 나오면 온톨로지를 확장하는 OHCF를 제안한다.

3 3. 방법론 개요

- 방법은 세 부분으로 이루어진다: 온톨로지(DDO) 구축 → 지식 추출 → 지식 융합

4 방법론 - 댐 결함 온톨로지(DDO) 구축

온톨로지 개발의 이유: 위험 용어를 통일하고, 복잡한 원인 매커니즘의 상관분석을 가능하게 하며, 지능형 진단과 의사결정같은 하위 응용을 지원하는데 필수적이다

1. 댐 위험 도메인 온톨로지와 관련 작업 정의
2. 댐 위험과 관련된 기존 온톨로지 모델의 재사용 검토
3. 관련 용어 나열
4. 온톨로지 클래스와 계층 구조 정의
5. 클래스 속성과 관계 정리
6. 제약 명시
7. 인스턴스 생성

온톨로지는 OWL(온톨로지를 표현하는 표준 언어, W3C 권고)로 작성했고, Protégé(온톨로지 편집 프로그램)로 만들고 관리했다.

5 그림 1. DDKG 구축 틀 [방법]

- 온톨로지 구축: 클래스 7개(Dam, Properties, Location, Parameter, HazardForm, HazardComponent, SafetyEvaluation)와 관계 8개를 정의하고 Protégé로 만든다.
- 지식 추출
  - 국가 저수지 시스템의 정형 데이터 → 그대로 내보내 정형 표가 된다.
  - 댐 안전평가 보고서(DOC, PDF, PNG) → 형식 변환과 필요한 부분 찾기 → 비정형 데이터(글 모음) → LLM과 온톨로지(c5, c6, c7)로 처리 → 위험 서술 개체
- 지식 융합
  - OHCF로 위험 서술을 온톨로지의 종류로 분류한다: 전문가 정답 예시로 LLM 추가 학습 → 온도를 바꿔 여러 번 분류 → 투표 → 말이 안 되는 조합 검사 → 애매한 것은 전문가 검토
  - 정형 표와 통과한 결과를 관계와 함께 합쳐 DDKG를 만든다.

describe domain-specific classes and attributes.

1 The structure of the DDO can be represented using the triple form shown in Equation (1):

$$DDO = \langle C, P, H \rangle \tag{1}$$

1 where $C = \{c_i | i \in N^*\}$ is the set of top-level classes; c_i is the i−th top-level class; $P = \{p_{ij} | i, j \in N^*, i \neq j\}$ is the set of object properties, where p_{ij} represents a directed relationship $c_i \rightarrow c_j$; $H = \{S_i | c_i \in C^*\}$ is the set of all subclasses under each top-level class, where $S_i = \{c_i(j_1, j_2, \ldots, j_k) | i, k, j_k \in N^*\}$ represents the subclass set under top-level class c_i, and $c_i(j_1, j_2, \cdots, j_k)$ denotes a path index sequence (e.g., $c_3(2,1)$ represents the first child of the second subclass under top-level class c_3).

2 Dam defects arise from the coupled effects of intrinsic engineering factors and environmental conditions. Therefore, seven top-level classes are initially defined in the DDO, as summarized in Table 1.

3 To further enhance the semantic expressiveness and structural rigor of the DDO, both semantic and hierarchical relationships are constructed. Semantic relationships are primarily established by defining object properties to link different top-level entity classes. Table 2 provides the object properties defined in the ontology structure. All top-level classes are connected to the Dam entity to anchor all related information to specific engineering instances. Specifically, HazardForm is linked to HazardComponent via "occursAt.".

3 Hierarchical relationships are constructed using "hasSubclass" to form internal hierarchical structures for each top-level class, aiming to increase the depth and granularity of knowledge representation. For example, subclasses such as "dam height" and "reservoir capacity" are defined under the Parameter class. Hierarchical relationships allow subclasses to inherit object properties from their parent classes. This effectively improves the reusability, scalability, and reasoning capability of the model. Fig. 2 shows the DDO modeling in Protégé.

4 Among the top-level classes, "c_5 HazardForm" and "c_6 HazardComponent" are directly related to engineering hazards and constitute the most critical elements of the DDKG. These entities must be extracted from unstructured text, which poses considerable challenges. For instance, although LLMs can recognize entities such as "spillway" and "Side wall," they often fail to correctly parse the intrinsic "whole–part" logic between them. LLMs may incorrectly classify entities with subordinate relationships as being on the same hierarchical level, thereby overlooking the fact that the "Side wall" is a constituent subunit of the "spillway." Such parsing errors can directly compromise the integrity of the DDKG's knowledge structure.

4 To overcome these limitations in semantic understanding, this study refines the hierarchical construction of top-level classes c_5 and c_6 based on expert knowledge. The detailed construction is described below.

4 (a) Hierarchical structure of HazardForm.

To ensure scientific rigor and validity of hierarchical structures, it is generally needed to reference industry technical standards or national/regional administrative regulations. In China, for example, the *Guidelines on Dam Safety Evaluation* (SL 258–2017) specify that the safety of a dam project is assessed based on five categories of specialized indicators: flood control, seepage, structural integrity, seismic performance, and metal structure. These indicators provide a standardized basis for dam safety evaluation.

2 **Table 1**
Top-level entity classes of the DDO.

c_i	Entity class
c_1	Dam
c_2	Properties
c_3	Location
c_4	Parameter
c_5	HazardForm
c_6	HazardComponent
c_7	SafetyEvaluation

Table 2
Definitions of object properties in the DDO.

p_{ij}	Object properties	Domains	Ranges
p_{12}	hasProperties	c_1	c_2
p_{13}	isLocatedln	c_1	c_3
p_{14}	hasParameter	c_1	c_4
p_{15}	exhibitsHazard	c_1	c_5
p_{16}	hasHazardAt	c_1	c_6
p_{17}	hasEvaluation	c_1	c_7
p_{56}	occursAt	c_5	c_6

As a result, hazard issues corresponding to these five categories are defined as level-1 subclasses of HazardForm. Under each level-1 subclass, level-2 and level-3 subclasses are further defined to capture detailed manifestations of engineering hazards. Table 3 presents the hierarchical structure of the HazardForm class.

4 (b) Hierarchical structure of Hazard Component.

The HazardComponent class is used to locate the specific structural positions where engineering hazards occur. Dam engineering structures can be broadly classified into water-retaining structures, outlet structures, and conveyance structures according to their functions. Water-retaining structures include the dam body, dam foundation, and dam abutment. Outlet structures comprise spillways, flood discharge tunnels, and bottom outlets. Conveyance structures consist of intake structures, conveyance pipelines, and control structures. Table 4 lists the hierarchical structure of the HazardComponent class in detail, with the three types of structures serving as its level-1 subclasses.

5 In practical applications, hierarchical modeling of complex engineering entities such as a dam project based solely on expert experience is inevitably constrained by knowledge boundaries. As a result, the ontology coverage may be limited. To address this, during knowledge extraction, the ontology is conceptually supplemented or hierarchically expanded based on identified undefined entities, as described in Section 3.2.3.

3.2. Data layer construction

6 The data layer is designed to extract knowledge from multi-source heterogeneous data generated during the long-term operation of reservoir dam engineering systems, based on the DDO. This section presents the construction of the DDKG data layer and provides a detailed description of OHCF. The overall framework of data layer construction is displayed in Fig. 3.

3.2.1. Knowledge sources and preprocessing

7 The China Reservoir Operation and Management Platform stores a large volume of fundamental engineering data in the form of structured tables, which largely satisfy the data requirements of top-level classes c_1–c_4 in the DDO.

7 In contrast, the data corresponding to top-level classes c_5–c_7 are derived from unstructured text. These texts are highly heterogenous in formats, including PDF, DOC, and PNG files, and the original documents often contain redundant or irrelevant information. Prior to knowledge extraction, the texts are preprocessed to eliminate noise and normalize the data.

7 For a given unstructured text D, its format is first converted into a structured markdown representation D_{md}. State-of-the-art optical character recognition models [56] are then applied to perform layout parsing and format conversion. Next, regular expressions are used to delimit the boundaries of text blocks $D_{md,i}$ that contain relevant knowledge entities and remove redundant content. Finally, the extracted text blocks are integrated into a single corpus, denoted as T:

7 $$T = \{D_{md,1}, D_{md,2}, \cdots, D_{md,n}\} \tag{2}$$

메모 (p.4)

3.1 DDO 구축 (이어서) [방법]

1 온톨로지의 구조: DDO = 〈C, P, H〉 (식 1)

- DDO의 구조는 식 (1)의 삼항 형식으로 나타낼 수 있다
- C: 최상위 클래스의 집합
- P: 객체 속성의 집합, pij는 방향이 있는 관계 ci→cj
- H: 각 최상위 클래스 아래 모든 하위 클래스의 집합
- ci(j1,⋯,jk)는 경로 색인 순서열 (예: c3(2,1)은 최상위 클래스 c3의 두 번째 하위 클래스의 첫 번째 자식)

2 최상위 클래스 7개 (표 1)

- 댐 결함은 공학 내부 요인과 환경 조건의 결합 효과로 발생하므로, DDO에 7개의 최상위 클래스를 정의
- c1 Dam, c2 Properties, c3 Location, c4 Parameter, c5 HazardForm, c6 HazardComponent, c7 SafetyEvaluation

3 의미 관계와 계층 관계

- DDO의 의미 표현력과 구조적 엄밀성을 높이기 위해 의미 관계와 계층 관계를 구성
1. 의미 관계: 서로 다른 최상위 클래스를 연결하는 객체 속성 (표 2)
   - 모든 최상위 클래스는 관련 정보를 구체적인 공학 인스턴스에 고정하기 위해 Dam 개체에 연결
   - HazardForm은 occursAt을 통해 HazardComponent와 연결
2. 계층 관계: hasSubclass로 각 최상위 클래스 내부의 계층 구조를 형성하여 지식 표현의 깊이와 세밀도를 높임
   - 예: Parameter 클래스 아래 "dam height", "reservoir capacity" 하위 클래스
   - 하위 클래스는 상위 클래스의 객체 속성을 상속 → 재사용성, 확장성, 추론 능력 향상
- 그림 2: Protégé에서의 DDO 모델링

4 c5 HazardForm과 c6 HazardComponent의 계층 구성

- c5, c6는 공학 위험과 직접 관련된 DDKG의 가장 핵심 요소이며, 비정형 텍스트에서 추출해야 하므로 어려움이 따른다
- LLM은 "spillway", "Side wall" 같은 개체를 인식할 수 있지만, 그 사이의 "전체-부분" 논리를 올바르게 해석하지 못하는 경우가 많다
- 종속 관계의 개체를 같은 계층으로 잘못 분류할 수 있으며, 이는 DDKG 지식 구조의 무결성을 훼손
- 이를 극복하기 위해 전문가 지식을 바탕으로 c5, c6의 계층 구성을 정교화

(a) HazardForm의 계층 (표 3)

- 계층 구조의 과학적 엄밀성과 타당성을 위해 산업 기술 표준이나 행정 규정을 참조
- 중국 「Guidelines on Dam Safety Evaluation (SL 258–2017)」은 홍수 방어, 침투, 구조 안정성, 내진 성능, 금속 구조의 5개 지표 범주로 댐 안전을 평가
- 이 5개 범주의 위험을 HazardForm의 1단계 하위 클래스로 정의하고, 그 아래 2단계, 3단계 하위 클래스를 정의

(b) HazardComponent의 계층 (표 4)

- 공학 위험이 발생한 구체적인 구조적 위치를 특정
- 구조물을 기능에 따라 차수 구조물, 방류 구조물, 도수 구조물로 나누어 1단계 하위 클래스로 둠
  - 차수 구조물: 댐 본체, 기초, 댐 접합부
  - 방류 구조물: 여수로, 홍수 방류 터널, 바닥 배수구
  - 도수 구조물: 취수 구조물, 도수 관로, 제어 구조물

5 전문가 경험 기반 계층 모델링의 한계와 보완

- 전문가 경험만으로 하는 계층 모델링은 지식의 경계에 의해 제약되어 온톨로지의 포괄 범위가 제한될 수 있다
- 이를 해결하기 위해 지식 추출 과정에서 식별된 미정의 개체를 바탕으로 온톨로지를 개념적으로 보완하거나 계층적으로 확장 (3.2.3)

6 3.2 데이터 계층 구축


- 데이터 계층은 DDO를 바탕으로, 저수지 댐 공학 시스템의 장기 운영 중 생성된 다중 출처의 이질적 데이터로부터 지식을 추출하도록 설계
- 이 절은 DDKG 데이터 계층의 구축과 OHCF를 설명하며, 전체 틀은 그림 3

3.2.1 지식 출처와 전처리 [방법]

7 지식 출처와 비정형 텍스트 전처리

- 정형 표: 중국 저수지 운영관리 플랫폼의 기본 공학 데이터, 최상위 클래스 c1~c4의 데이터 요구를 대부분 충족
- 비정형 텍스트: c5~c7의 데이터, PDF, DOC, PNG 등 형식이 이질적이고 중복되거나 관련 없는 정보가 많음
- 지식 추출 전에 잡음을 제거하고 데이터를 정규화하기 위해 텍스트를 전처리 (식 2)

1. 비정형 텍스트 D를 구조화된 마크다운 표현 Dmd로 변환 (OCR 모델로 레이아웃 분석과 형식 변환)
2. 정규식으로 관련 지식 개체를 포함하는 텍스트 블록 Dmd,i의 경계를 구분하고 중복 내용 제거
3. 추출된 텍스트 블록을 하나의 말뭉치 T로 통합

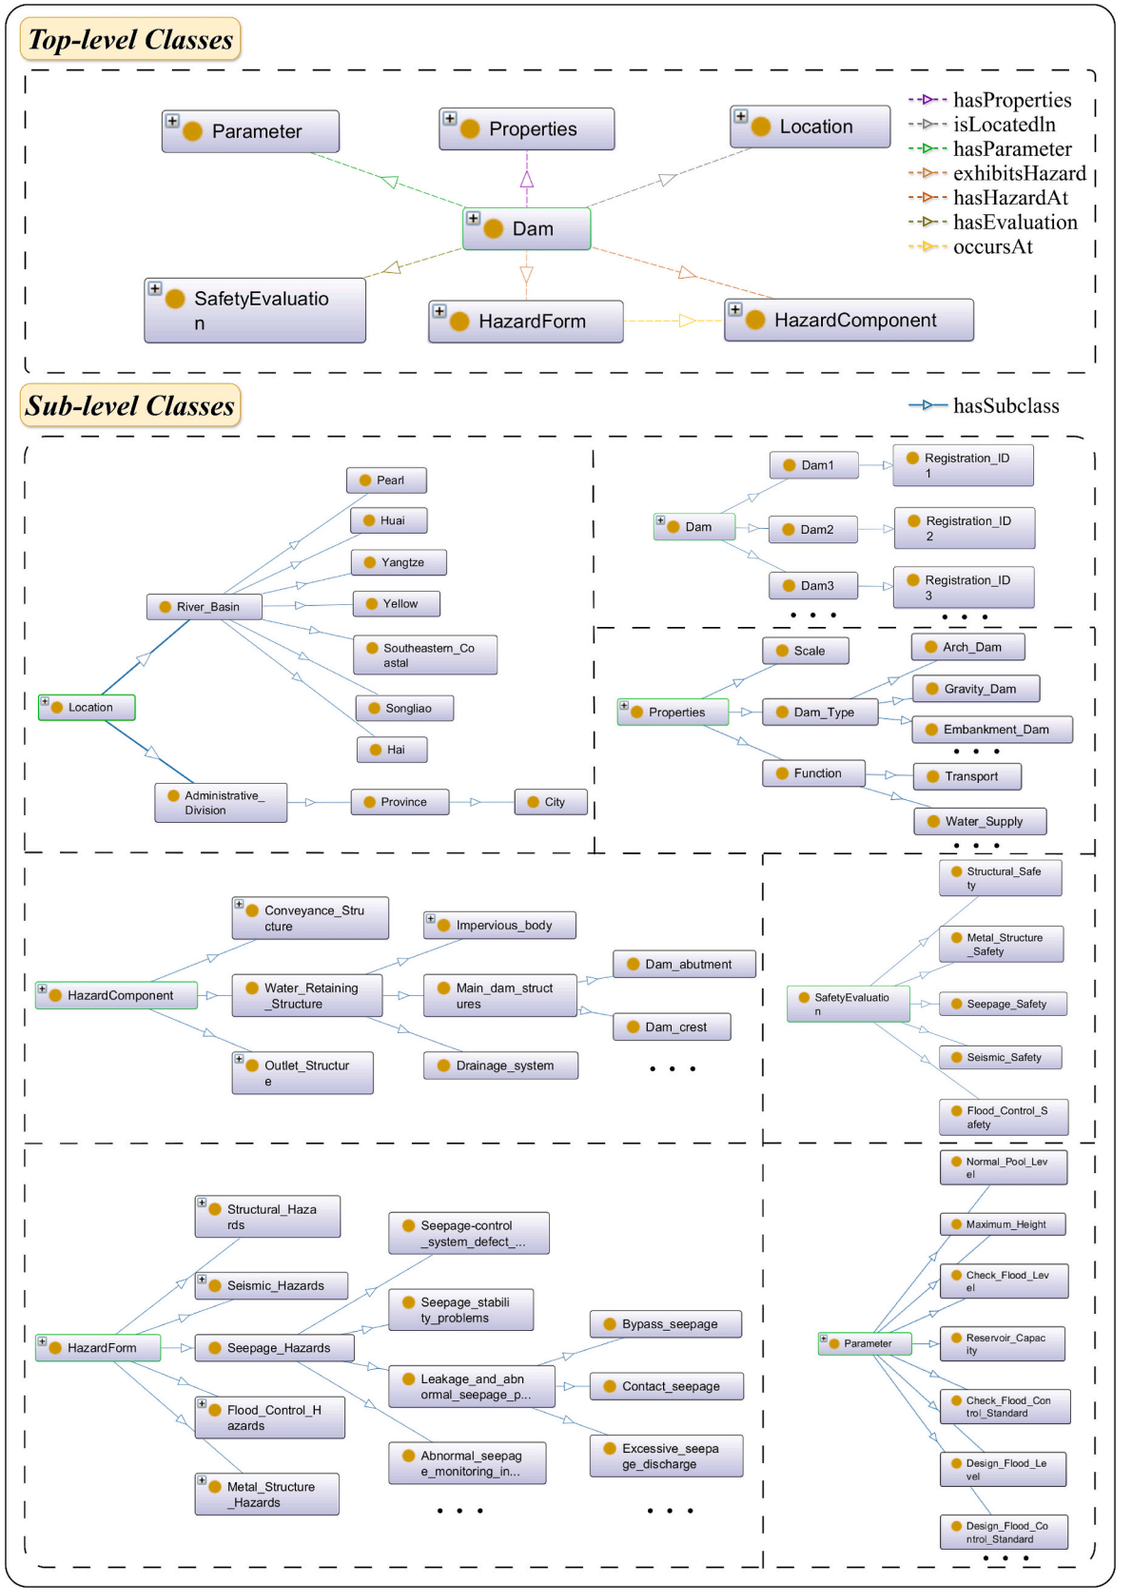

1 **Fig. 2.** DDO in Protégé.

메모 (p.5)

1 그림 2. Protégé에서의 DDO [결과]

- Top-level Classes: 7개 최상위 클래스와 객체 속성(hasProperties, isLocatedIn, hasParameter, exhibitsHazard, hasHazardAt, hasEvaluation, occursAt). Dam이 나머지 클래스와 연결되고, HazardForm은 occursAt으로 HazardComponent와 연결
- Sub-level Classes: 각 최상위 클래스의 hasSubclass 하위 클래스
  - Location: River_Basin(Pearl, Huai, Yangtze 등), Administrative_Division → Province → City
  - Dam: Dam1, Dam2, Dam3 … 과 Registration_ID
  - Properties: Scale, Dam_Type(Arch_Dam, Gravity_Dam, Embankment_Dam 등), Function(Transport, Water_Supply 등)
  - HazardComponent: Conveyance_Structure, Water_Retaining_Structure, Outlet_Structure 등
  - SafetyEvaluation: Structural, Metal_Structure, Seepage, Seismic, Flood_Control Safety
  - HazardForm: Structural, Seismic, Seepage, Flood_Control, Metal_Structure Hazards 등
  - Parameter: Normal_Pool_Level, Maximum_Height, Check_Flood_Level, Reservoir_Capacity 등

Table 3
Subclasses of "c_5 Hazard Form".

Subclass (level 1)	Subclass (level 2)	Subclass (level 3)
c_5(1) Flood Control Hazards	c_5(1,1) Flood control standard hazards	c_5(1,1,1) Floods exceeding design standard; c_5(1,1,2) Insufficient design flood standard; c_5(1,1,3) Design flood estimates fail to meet requirements; c_5(1,1,4) Failure to meet the requirements for recent extraordinary flood operation standards
	c_5(1,2) Insufficient freeboard of water-retaining structures	c_5(1,2,1) Insufficient water-retaining elevation; c_5(1,2,2) Incomplete enclosure of water-retaining structures
	c_5(1,3) Discharge capacity hazards	c_5(1,3,1) Missing flood control facilities; c_5(1,3,2) Insufficient discharge capacity
c_5(2) Seepage Hazards	c_5(2,1) Seepage-control system defect hazards	c_5(2,1,1) Incomplete or failed impervious body; c_5(2,1,2) Inadequate grouting; c_5(2,1,3) Abnormal filter and drainage facilities; c_5(2,1,4) Seepage-control defects at contact zones
	c_5(2,2) Leakage and abnormal seepage phenomena	c_5(2,2,1) Excessive seepage discharge; c_5(2,2,2) Contact seepage; c_5(2,2,3) Bypass seepage; c_5(2,2,4) Diffuse seepage; c_5(2,2,5) Turbid seepage water
	c_5(2,3) Seepage stability problems	c_5(2,3,1) Insufficient seepage stability; c_5(2,3,2) Piping; c_5(2,3,3) Soil flow
	c_5(2,4) Abnormal seepage monitoring indicators	c_5(2,4,1) Abnormal changes in seepage discharge; c_5(2,4,2) Abnormal phreatic line; c_5(2,4,3) Abnormal uplift pressure
c_5(3) Structural Hazards	c_5(3,1) Structural design defects	c_5(3,1,1) Insufficient width; c_5(3,1,2) Insufficient elevation; c_5(3,1,3) Missing protective components
	c_5(3,2) Abnormal deformation and displacement	c_5(3,2,1) Excessive settlement; c_5(3,2,2) Abnormal displacement; c_5(3,2,3) Deformation failing to meet requirements
	c_5(3,3) Structural load-bearing and stability defects	c_5(3,3,1) Insufficient structural strength; c_5(3,3,2) Insufficient stability
c_5(4) Seismic Hazards	c_5(4,1) Seismic design and fortification defects	c_5(4,1,1) Insufficient seismic fortification intensity; c_5(4,1,2) Incorrect seismic fortification category; c_5(4,1,3) Incorrect design seismic parameters
	c_5(4,2) Seismic load-bearing and stability defects	c_5(4,2,1) Insufficient seismic strength; c_5(4,2,2) Insufficient seismic stability; c_5(4,2,3) Inadequate seismic measures; c_5(4,2,4) Potential structural liquefaction
c_5(5) Metal Structure Hazards	c_5(5,1) Layout and type-selection defects	c_5(5,1,1) Unreasonable layout; c_5(5,1,2) Unreasonable type selection; c_5(5,1,3) Insufficient lifting height of the hoisting mechanism; c_5(5,1,4) Insufficient span of the hoisting mechanism
	c_5(5,2) Service-life and durability defects	c_5(5,2,1) Exceeded the service life for depreciation and retirement; c_5(5,2,2) Surface corrosion and rusting; c_5(5,2,3) Seal failure
	c_5(5,3) Structural performance defects of metal structures	c_5(5,3,1) Insufficient strength of metal structures; c_5(5,3,2) Insufficient stability of metal structures
	c_5(5,4) Abnormal operational functions	c_5(5,4,1) Insufficient hoisting force; c_5(5,4,2) Jamming or failure in opening and closing operations; c_5(5,4,3) Abnormal safety protection devices; c_5(5,4,4) Abnormal locking or pressure-equalizing devices
	c_5(5,5) Abnormal auxiliary and support systems	c_5(5,5,1) Abnormal power supply; c_5(5,5,2) Abnormal control system

Table 4
Subclasses of "c_6 HazardComponent".

Subclass (level 1)	Subclass (level 2)	Subclass (level 3)
c_6(1) Water-retaining structures	c_6(1,1) Main dam structures	c_6(1,1,1) Dam crest; c_6(1,1,2) Dam abutment; c_6(1,1,3) Dam foundation; c_6(1,1,4) Dam toe; c_6(1,1,5) Dam body; c_6(1,1,6) Dam slope/surface; c_6(1,1,7) Wave wall; c_6(1,1,8) Flood control system
	c_6(1,2) Impervious body	c_6(1,2,1) Dam impervious body; c_6(1,2,2) Foundation impervious body
	c_6(1,3) Drainage system	c_6(1,3,1) Dam body drainage; c_6(1,3,2) Foundation drainage; c_6(1,3,3) Abutment drainage
c_6(2) Outlet structures	c_6(2,1) Spillway	c_6(2,1,1) Spillway intake/control section; c_6(2,1,2) Chute; c_6(2,1,3) Side wall; c_6(2,1,4) Spillway energy dissipation structures; c_6(2,1,5) Spillway metal structures
	c_6(2,2) Flood discharge tunnel	c_6(2,1,1) Spillway intake/control section; c_6(2,1,2) Chute; c_6(2,1,3) Side wall; c_6(2,1,4) Spillway energy dissipation structures; c_6(2,1,5) Spillway metal structures
	c_6(2,4) Other outlet structures	c_6(2,3,1) Bottom outlet; c_6(2,3,2) Emergency spillway; c_6(2,3,3) Emptying pipe; c_6(2,3,4) Other outlet metal structures
c_6(3) Conveyance structures	c_6(3,1) Intake structures	c_6(3,1,1) Intake tower; c_6(3,1,2) Inclined intake pipe; c_6(3,1,3) Metal structures of intake facilities
	c_6(3,3) Conveyance pipelines	c_6(3,2,1) Conveyance culvert; c_6(3,2,2) Conveyance tunnel; c_6(3,2,3) Metal structures of conveyance pipelines

3.2.2. *Rule-based knowledge extraction*

1 Entities associated with the top-level class c_7 represent safety evaluation results in dam safety reports, including flood-control, seepage, structural, seismic, and metal-structure safety evaluations. Each evaluation is classified into Grade A, B, or C, corresponding to no defect, minor defect, and serious defect, respectively. Because these results are generally described in highly standardized forms, they can be directly extracted using regular expressions. For example, from the expression "the flood-control safety rating is Grade C", the flood-control safety evaluation result can be accurately extracted as "C", without the need for deep learning-based recognition.

3.2.3. *LLM-based knowledge extraction*

2 In contrast, the extraction of engineering hazard entities is more challenging, with the core difficulty lying in how to accurately assign hazard information expressed in complex and diverse forms to the predefined category system of the DDO.

2 General-purpose language models achieve relatively low accuracy on this highly specialized task, as also supported by the experimental results presented in Section 4.2.3. Although general-purpose LLMs show limited performance in fine-grained classification, under explicit instruction constraints they are still able to extract hazard-related descriptive fragments from engineering reports efficiently, that is, they can effectively determine which parts of the text correspond to hazard

메모 (p.6)

1 3.2.2 규칙 기반 지식 추출 [방법]

- c7 개체는 댐 안전 보고서의 안전평가 결과(홍수 방어, 침투, 구조, 내진, 금속 구조 안전평가)
- 각 평가는 A, B, C 등급으로 분류되며 각각 결함 없음, 경미한 결함, 심각한 결함
- 고도로 표준화된 형태로 서술되므로 정규식으로 바로 추출
  - 예: "the flood-control safety rating is Grade C" → "C", 딥러닝 기반 인식이 필요 없음


3.2.3 LLM 기반 지식 추출 [방법]

2 위험 개체 추출의 어려움

- 핵심 난점은 복잡하고 다양한 형태로 표현된 위험 정보를 DDO의 미리 정의된 범주 체계에 정확히 배정하는 것
- 범용 언어모델은 이 고도로 전문적인 과제에서 정확도가 비교적 낮음 (4.2.3)
- 다만 명시적인 지시 제약 아래에서는 공학 보고서로부터 위험 관련 서술 조각을 효율적으로 추출할 수 있음

3 표 3, 표 4

- 표 3: c5 HazardForm의 하위 클래스 (1단계 5개 → 2단계 → 3단계)
- 표 4: c6 HazardComponent의 하위 클래스 (1단계 3개 → 2단계 → 3단계)

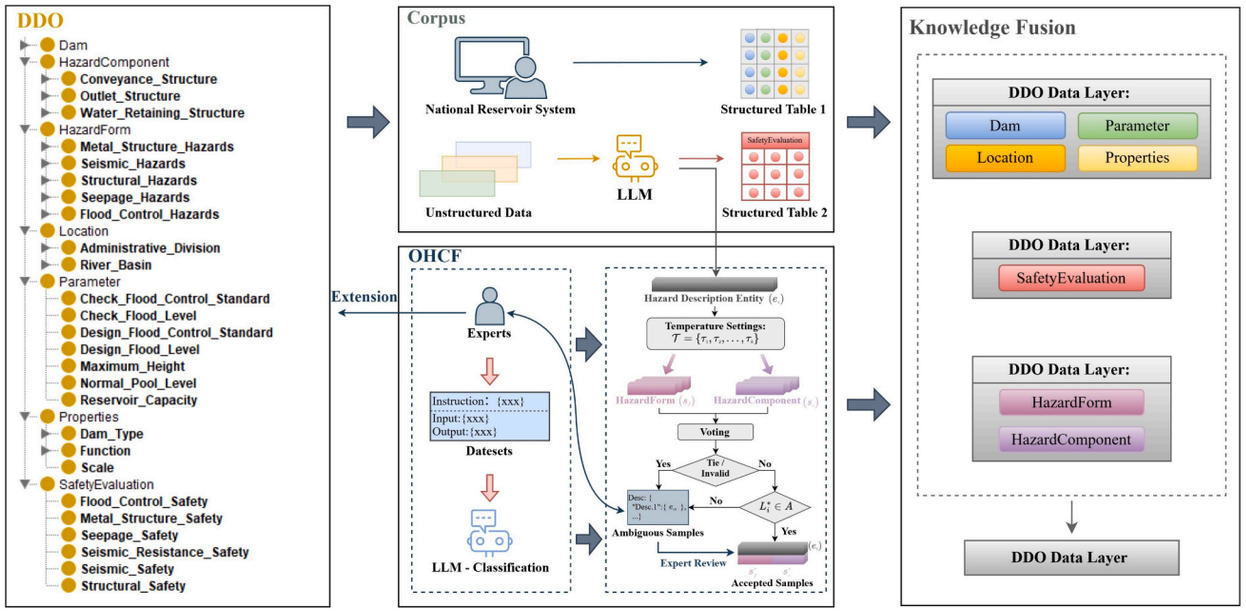

4 **Fig. 3.** Framework for data layer construction.

1 descriptions. Accordingly, given an input report text T, the extraction prompt P_1 is first used to identify hazard-related descriptive fragments. However, the results obtained at this stage are usually still descriptive fragments directly extracted from the original text, and often contain nested expressions, meaning that a single sentence may simultaneously include multiple combinations of hazard forms and hazard components. 1 This creates an obstacle to subsequent hazard classification. To address this issue, this study further designs a description-splitting prompt P_2 to decompose complex hazard expressions into hazard description units that are semantically more explicit and structurally more singular, as shown in Fig. 4. The above two-step process can be formulated as Equation (3).

$$T \xrightarrow{P_1} H = \{h_1, h_2, \ldots, h_m\} \xrightarrow{P_2} E = \{e_1, e_2, \ldots, e_n\} \tag{3}$$

1 where h_i denotes a hazard-related descriptive fragment extracted from the original text, and e_i denotes a hazard description unit obtained after description splitting. Based on our instance-level observations, general-purpose LLMs can perform both tasks in a relatively stable manner using prompts alone, without task-specific training.

3 On this basis, OHCF is designed to classify each hazard description unit into the third-level labels of classes c_5 and c_6 defined in the DDO. OHCF consists of four stage:

a) LLM fine-tuning.

To improve the model's ability to perform fine-grained classification under limited computational resources, low-rank adaptation (LoRA) is

```
===== PROMPT =====
You are an expert in processing textual descriptions from dam safety appraisal reports.
Please semantically decompose the input hazard description into several hazard description units with clear and singular meanings.

Requirements:
1. Each output sentence should contain only one hazard component and one hazard form.
2. If multiple hazard forms share the same hazard component in the original text,
   the shared component should be explicitly completed in each decomposed sentence.
3. Do not change the original meaning or add information that is not present in the input text.
4. List the results as complete hazard description sentences.

===== INPUT =====
The downstream slope of the dam lacks slope protection, and there are issues
with an elevated phreatic line exit point and multiple areas of diffuse seepage.

===== MODEL =====
deepseek-v3

===== OUTPUT =====
1. The downstream slope of the dam lacks slope protection.
2. The downstream slope of the dam has an elevated phreatic line exit point.
3. The downstream slope of the dam has multiple areas of diffuse seepage.
```

2 **Fig. 4.** Example of nested hazard description splitting using prompting.

메모 (p.7)

1 3.2.3 (이어서) 위험 서술 조각 추출과 분할 [방법]

1. 추출 프롬프트 P1로 입력 보고서 텍스트 T에서 위험 관련 서술 조각을 식별
   - 이 단계의 결과는 원문에서 직접 추출한 서술 조각이며, 한 문장에 여러 위험 형태와 위험 부위의 조합이 동시에 포함되는 중첩 표현이 많아 이후 분류에 장애가 됨
2. 서술 분할 프롬프트 P2로 복잡한 위험 표현을 의미가 더 명확하고 구조가 더 단일한 위험 서술 단위로 분해 (그림 4)

- 식 (3): T →(P1) H = {h1,⋯,hm} →(P2) E = {e1,⋯,en}
  - hi: 원문에서 추출한 위험 관련 서술 조각, ei: 분할 후 얻은 위험 서술 단위
- 인스턴스 수준의 관찰에 따르면 범용 LLM은 과제 특화 학습 없이 프롬프트만으로 두 과제를 비교적 안정적으로 수행

2 그림 4. 프롬프트를 이용한 중첩 위험 서술 분할 예 [결과]

- PROMPT: 댐 안전 감정 보고서 서술 처리 전문가 역할, 입력 위험 서술을 명확하고 단일한 의미의 위험 서술 단위로 분해하도록 지시
- 요구사항
  1. 각 출력 문장은 위험 부위 하나와 위험 형태 하나만 포함
  2. 여러 위험 형태가 같은 위험 부위를 공유하면, 분해한 각 문장에 공유 부위를 명시적으로 보완
  3. 원래 의미를 바꾸거나 입력에 없는 정보를 추가하지 않음
  4. 결과를 완전한 위험 서술 문장으로 나열
- INPUT: 하류 사면의 사면 보호 부재, 침윤선 출구 상승, 여러 곳의 확산 침투가 한 문장에 있음
- MODEL: deepseek-v3
- OUTPUT: 하류 사면을 각각 명시한 3개 문장

3 OHCF: 위험 서술 단위 분류 [방법]

- OHCF는 각 위험 서술 단위를 DDO에 정의된 c5와 c6의 3단계 라벨로 분류
- 네 단계: a) LLM 미세조정, b) 온도 교란 투표, c) 온톨로지 제약 일관성 검사, d) 전문가 검토와 온톨로지 확장

4 그림 3. 데이터 계층 구축의 틀 [방법]

- DDO: 최상위 클래스와 하위 클래스 계층
- Corpus: National Reservoir System → Structured Table 1, Unstructured Data → LLM → Structured Table 2(SafetyEvaluation)와 Hazard Description Entity
- OHCF: Experts → Datasets(Instruction, Input, Output) → LLM-Classification, Temperature Settings → HazardForm·HazardComponent → Voting → Tie/Invalid이거나 L*i∈A이면 Ambiguous Samples → Expert Review, 아니면 Accepted Samples / Experts → Extension → DDO
- Knowledge Fusion: Dam·Parameter·Location·Properties, SafetyEvaluation, HazardForm·HazardComponent의 DDO Data Layer → DDO Data Layer

adopted to fine-tune a lightweight LLM, enabling it to learn the semantic mapping between hazard description units and the ontology-defined labels.

LoRA is an efficient parameter-adaptation method for fine-tuning large models [57]. It requires updates to only a small number of parameters to improve performance on downstream tasks. The core principle of LoRA is to freeze the original weight matrix $W_0 \in \mathbb{R}^{m\times n}$ of the model and update only the parameters of the incremental matrix ΔW. The incremental update can be expressed as Equation (4), where ΔW is decomposed into two smaller matrices A and B. The output h of the fine-tuned model is obtained by summing the products of the original weight matrix W_0 and the incremental matrix ΔW with the same input vector x, as shown in Equation (5).

$$W_0 + \Delta W = W_0 + BA, A \in \mathbb{R}^{(r\times n)}, B \in \mathbb{R}^{(m\times r)} \tag{4}$$

$$h = W_0 x + \Delta W x = W_0 x + BAx \tag{5}$$

After fine-tuning, the functionality of the model can be formally described as a function f_{θ^*}, which generates corresponding standardized entity labels for any candidate entity:

$$f_{\theta^*} : e_i \rightarrow (s_f, s_c), s_f = c_5(j_1, j_2, j_3), s_c = c_6(k_1, k_2, k_3) \tag{6}$$

b) Temperature-perturbed voting strategy for hazard classification

For generative models, the result of a single inference is not necessarily the globally optimal solution. To further reduce the probability of misclassification, a voting mechanism is introduced. Specifically, n different model temperatures $\mathcal{T} = \{\tau_1, \tau_2, ..., \tau_n\}$ are used to independently perform n inference runs for a given hazard description entity e_i. The frequency with which each candidate label appears across these runs is then counted as its number of votes. Following the majority principle, the candidate labels that receive the highest number of votes are selected as the final and most reliable classification result L_i^*, as defined in Equations (7) – (9).

$$L_i^* = (s_f^*, s_c^*) \tag{7}$$

$$s_f^* = \underset{s_f \in S_5}{\operatorname{argmax}} \sum_{k=1}^{n} \mathbb{I}(s_{f,k} = s_f) \tag{8}$$

$$s_c^* = \underset{s_c \in S_6}{\operatorname{argmax}} \sum_{k=1}^{n} \mathbb{I}(s_{c,k} = s_c) \tag{9}$$

where $s_{f,k}$ and $s_{c,k}$ are the c_5 class and c_6 class obtained from the $k-$th independent inference of e_i, respectively, while s_f^* and s_c^* are the highest-scoring results among the k inference results, that is, the optimal solutions.

For samples where the model fails to produce classification labels or where the voting results in a tie, the system uniformly assigns a "*False*" identifier and forwards these samples to Stage d for further processing.

c) Ontology-constraint consistency checking.

Although the temperature-perturbed voting strategy improves the stability of hazard classification, the model may still generate clearly inconsistent label pairs. For example, if the hazard description "the existing wave wall crest elevation is insufficient" is classified after voting as the label pair (s_f^*: c_5(1,2,1) Insufficient water-retaining elevation, s_c^*: c_6(1,2,1) Dam impervious body), the resulting pair is obviously inconsistent with engineering knowledge.

To further improve the reliability of classification results, this study introduces an ontology-constraint consistency checking module. A constraint-conflict set A, defined as a sparse subset of the cartesian product, is introduced to record clearly incompatible c_5 and c_6 label pairs according to the DDO hierarchy and engineering knowledge, as expressed in Equation (10).

$$A \subseteq S_f \times S_c \tag{10}$$

Based on this constraint-conflict set, a classification consistency checking function V is defined. V takes the final classification result $L_i^* = (s_f^*, s_c^*)$ from Stage b as input, determines whether the classification result violates the predefined ontology constraints, and outputs a Boolean value:

$$V(L_i^*) = V(s_f^*, s_c^*) = \begin{cases} False & \text{if } (s_f^*, s_c^*) \in A \\ True & \text{if } (s_f^*, s_c^*) \notin A \end{cases} \tag{11}$$

Entity samples for which $V(L_i^*) = Ture$ are accepted, but samples with $V(L_i^*) = False$ are forwarded to Stage d for further handling.

d) Expert review and ontology expansion

Samples marked as "*False*" are automatically aggregated by the system and submitted to an expert review queue, where they await manual evaluation by domain experts.

During the review process, experts first determine whether the concept corresponding to a given sample already exists in the DDO. If the concept is already present, experts correct the classification label by linking the hazard description unit to the correct existing ontology node. If the expert confirms that the concept is new, a corresponding node is added to the DDO, and the hazard description entity is then associated with this newly created node. In this semi-automated workflow, the system automatically filters ambiguous samples and experts perform final label correction and ontology evolution. In this way, the DDO achieves dynamic updating and iterative expansion.

3.3. KG storage

In this paper, the Neo4j graph database is selected as the underlying storage platform for DDKG. Utilizing the Cypher query language, Neo4j enables efficient knowledge querying, addition, deletion, and modification. It also exhibits superior performance in executing deep associative queries and multi-hop reasoning [58], providing robust support for subsequent knowledge retrieval and interaction.

The knowledge extracted in Section 3.2 is integrated into JSON format. Based on the semantic and hierarchical relationships within the DDO, a Python script was developed to parse JSON key-value pairs and generate corresponding Cypher statements. This process facilitates the batch creation of DDKG nodes and the construction of inter-entity relationships, completing the injection of dam hazard knowledge into the Neo4j database.

4. Case study

This section begins by outlining the data sources for the case study. Subsequently, ablation experiments are conducted to systematically validate the effectiveness of the key components of OHCF. Finally, the DDKG is established, and its application in dam defect analysis is demonstrated.

4.1. Data sources

In China, dam projects are categorized into Class I, II, and III based on their safety status. Class III dams, which are characterized by significant safety hazards, offer safety appraisal reports that serve as an invaluable data source for risk information. The knowledge in the DDKG is derived from two primary datasets: (1) basic engineering attributes, hydrological records, and geospatial data collected from the China Reservoir Operation and Management Platform; and (2) safety appraisal reports of 22,076 distressed dams across China recorded between 2000 and 2025.

The safety assessment reports of dams in China have a unified standardized structure. The entities related to the top-level classes c_5 to c_7 exist in the following four parts of the report: on-site inspection (including engineering appearance inspection, geological exploration,

메모 (p.8)

1 a) LLM 미세조정 [방법]
- 제한된 계산 자원에서 세밀한 분류 능력을 높이기 위해 LoRA로 경량 LLM을 미세조정하여 위험 서술 단위와 온톨로지 라벨 사이의 의미적 대응을 학습
- LoRA: 대형 모델 미세조정을 위한 효율적인 파라미터 적응 방법으로, 소수의 파라미터만 갱신
  - 원래 가중치 행렬 W0를 고정하고 증분 행렬 ΔW만 갱신하며, ΔW는 두 작은 행렬 A와 B로 분해 (식 4)
  - 출력 h = W0x + ΔWx = W0x + BAx (식 5)
- 미세조정 후 모델은 후보 개체 ei에 대해 표준화된 라벨 (sf, sc)를 생성하는 함수 fθ*로 기술 (식 6)

2 b) 온도 교란 투표 [방법]
- 생성 모델에서 한 번의 추론 결과가 반드시 전역 최적 해는 아니므로, 오분류 확률을 줄이기 위해 투표 메커니즘 도입
1. 위험 서술 개체 ei에 대해 서로 다른 n개의 온도 T = {τ1,⋯,τn}로 n번 독립 추론
2. 각 후보 라벨이 나타난 빈도를 득표수로 셈
3. 다수결 원칙에 따라 가장 많은 표를 받은 라벨을 최종 분류 결과 L*i로 선택 (식 7~9)
- 분류 라벨을 내지 못하거나 동점인 샘플은 "False"로 표시하고 d단계로 넘김

3 c) 온톨로지 제약 일관성 검사 [방법]
- 투표 후에도 명백히 일관되지 않은 라벨 쌍이 생성될 수 있음
  - 예: "the existing wave wall crest elevation is insufficient" → (c5(1,2,1) Insufficient water-retaining elevation, c6(1,2,1) Dam impervious body)는 공학 지식과 맞지 않음
1. DDO 계층과 공학 지식에 따라 명백히 양립할 수 없는 c5와 c6 라벨 쌍을 제약 충돌 집합 A로 기록 (식 10)
2. 일관성 검사 함수 V: 분류 결과 (s*f, s*c)가 A에 속하면 False, 속하지 않으면 True (식 11)
3. True인 샘플은 수용, False인 샘플은 d단계로 넘김

4 d) 전문가 검토와 온톨로지 확장 [방법]
- "False"로 표시된 샘플은 자동으로 모아 전문가 검토 대기열에 제출
- 전문가는 해당 개념이 DDO에 이미 있는지 판단
  - 있으면: 위험 서술 단위를 올바른 기존 온톨로지 노드에 연결하여 라벨 수정
  - 새 개념이면: DDO에 노드를 추가하고 위험 서술 개체를 새 노드에 연결
- 시스템은 모호한 샘플을 자동으로 걸러내고 전문가는 최종 라벨 수정과 온톨로지 진화를 수행하는 준자동 작업 흐름 → DDO의 동적 갱신과 반복적 확장

5 3.3 KG 저장 [방법]
- 저장 플랫폼: Neo4j 그래프 데이터베이스
  - Cypher 질의 언어로 효율적인 질의, 추가, 삭제, 수정이 가능하고, 깊은 연관 질의와 다중 홉 추론에서 우수한 성능
1. 3.2절에서 추출한 지식을 JSON 형식으로 통합
2. DDO의 의미·계층 관계를 바탕으로 Python 스크립트가 JSON 키-값 쌍을 파싱하여 Cypher 문 생성
3. DDKG 노드 일괄 생성과 개체 간 관계 구성으로 Neo4j에 주입

6 4. 사례 연구 개요
- 데이터 출처 개괄 → OHCF 핵심 구성요소의 효과를 검증하는 제거 실험 → DDKG 구축과 댐 결함 분석 응용 시연

7 4.1 데이터 출처
- 중국의 댐은 안전 상태에 따라 1, 2, 3류로 분류되며, 상당한 안전 위험이 있는 3류 댐의 안전 감정 보고서가 위험 정보의 데이터 출처
1. 중국 저수지 운영관리 플랫폼의 기본 공학 속성, 수문 기록, 지리공간 데이터
2. 2000~2025년 중국 전역 위험 댐 22,076개의 안전 감정 보고서

etc.), dam safety analysis and evaluation (sub-item analysis on aspects such as flood control, seepage, and structure of the project), summary of main issues, and safety assessment conclusions. Using the preprocessing method in Section 3.2.1, these four main sections in each dam safety assessment report are identified and extracted through regular expressions, serving as the corpus for subsequent entity recognition.

4.2. Model training and evaluation

4.2.1. Dataset construction

Currently, there are no publicly available model training datasets for hydraulic engineering safety hazards. Therefore, this study constructs a domain-specific dataset using a semi-automated annotation workflow, which consists of three stages: preliminary machine labeling [59], expert verification, and data augmentation [60]. DeepSeek-V3-671B was first used to generate preliminary labels for the extracted hazard description samples. These labels were then verified and corrected by domain experts, and data augmentation was subsequently performed based on the expert-corrected samples.

Fig. 5 illustrates the comprehensive workflow for the fine-tuning dataset construction. The dataset structure adopts the Alpaca format [61], which follows the "Instruction-Input-Output" triplet paradigm. In this framework, "Input" consists of pre-processed raw report text, while "Output" represents the corrected structured entity set. The "Instruction" is composed of three elements: role setting, task description, and output requirements. Role setting is designed to assign a specific identity and function to the model, guiding its comprehension of the task background; the task description defines the specific operations and objectives the model is expected to execute; and the output requirements dictate the desired format and content of the results—in this study, the output format is specified as JSON format.

A total of 120,471 hazard description samples were extracted and subjected to initial machine labeling. These annotated samples were mapped to the five hazard categories through the hierarchical relationships defined in the DDO. Subsequently, 1,200 samples were randomly selected from the annotated corpus for manual verification and validation by experts. To further enhance the dataset, the LLM) was prompted to perform semantic rewriting on the original hazard descriptions. This process generated new instances that are semantically equivalent but linguistically diverse, thereby enriching the training data. The statistics for the hazard samples at each stage of the process are summarized in Table 5.

Table 5
Number of hazard samples at each stage.

Type	Sample size	Expert-corrected samples	Data augmentation
Flood control	210	241	1205
Seepage	313	339	1695
Structural	372	353	1765
Seismic	187	188	940
Metal structure	218	179	895
Total	1300	1300	6500

4.2.2. Experimental configuration and evaluation metrics

Given that the tasks in this study are based on Chinese engineering texts, we selected open-source LLMs trained primarily on Chinese corpora for the experiments, including DeepSeek-V3-671B, Qwen3-32B, GLM4-32B, Qwen3-14B, GLM4-9B, and Qwen3-8B. All experiments were conducted on a server equipped with eight NVIDIA H800 80 GB GPUs, using Python 3.10 and CUDA 12.6. Model fine-tuning was implemented with the LLaMA-Factory framework, and no model quantization was applied. It should be noted that DeepSeek-V3-671B was not fine-tuned due to limitations in computational resources and dataset size; instead, it was used only as a baseline reference.

During fine-tuning, the maximum learning rate was set to 5×10^{-4}, and the number of training epochs was set to 7. The dataset was divided into training, validation, and test subsets at a ratio of 7:1:2. To reduce the risk of overfitting, an early stopping strategy was adopted [62]. Specifically, fine-tuning was terminated in advance if the validation loss continued to increase over several epochs.

Specifically, fine-tuning was terminated in advance if the validation loss continued to increase over several epochs "False" were regarded as null-output cases, indicating that no target entity was identified. The evaluation metrics included macro-averaged precision P_{macro}, macro-averaged recall R_{macro}, and macro-averaged F1-score $F1_{macro}$, with the calculation formulas presented in Equations (12) to (14).

$$P_{macro} = \frac{1}{n}\sum_{i=1}^{n} P_i = \frac{1}{n}\sum_{i=1}^{n} \frac{TP_i}{TP_i + FP_i} \tag{12}$$

$$R_{macro} = \frac{1}{n}\sum_{i=1}^{n} R_i = \frac{1}{n}\sum_{i=1}^{n} \frac{TP_i}{TP_i + FN_i} \tag{13}$$

$$F1_{macro} = \frac{1}{n}\sum_{i=1}^{n} F1_i = \frac{1}{n}\sum_{i=1}^{n} 2 \cdot \frac{P_i \cdot R_i}{P_i + R_i} \tag{14}$$

where TP_i is the number of samples whose true labels are class i and are

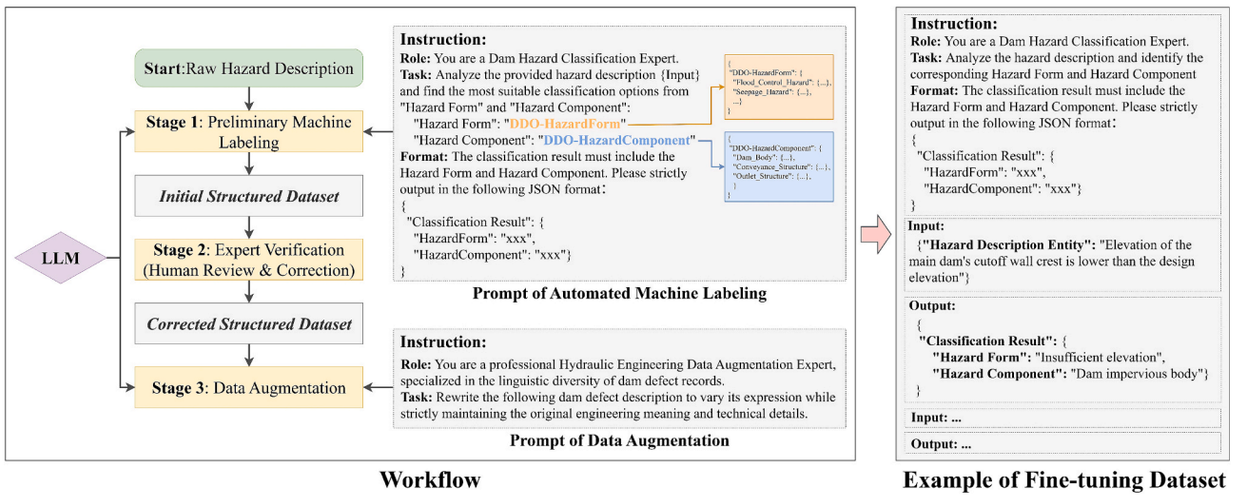


Fig. 5. Dataset construction.

메모 (p.9)

1 4.1 (이어서)
- 보고서는 통일된 표준 구조이며, c5~c7 관련 개체는 현장 점검, 댐 안전 분석·평가, 주요 문제 요약, 안전평가 결론의 네 부분에 있음
- 3.2.1의 전처리 방법으로 네 부분을 정규식으로 식별·추출하여 개체 인식 말뭉치로 사용

2 4.2.1 데이터셋 구축 [방법]
- 수리공학 안전 위험에 대한 공개 학습 데이터셋이 없어 준자동 주석 작업 흐름으로 도메인 특화 데이터셋 구축
1. 예비 기계 라벨링: DeepSeek-V3-671B로 위험 서술 샘플에 예비 라벨 생성
2. 전문가 검증: 도메인 전문가가 라벨을 검증·수정
3. 데이터 증강: 전문가가 수정한 샘플을 바탕으로 증강
- 데이터셋 구조: Alpaca 형식("Instruction-Input-Output" 삼항)
  - Input: 전처리된 원본 보고서 텍스트, Output: 수정된 구조화 개체 집합
  - Instruction: 역할 설정, 과제 설명, 출력 요구사항(JSON 형식)
- 120,471개 위험 서술 샘플 추출·기계 라벨링 → DDO 계층 관계로 5개 위험 범주에 대응 → 1,200개를 무작위로 골라 전문가 검증 → LLM으로 의미적 재작성하여 의미는 같고 표현이 다른 인스턴스 생성 (표 5)

3 그림 5. 데이터셋 구축 [결과]
- Workflow: Raw Hazard Description → Stage 1 Preliminary Machine Labeling → Initial Structured Dataset → Stage 2 Expert Verification → Corrected Structured Dataset → Stage 3 Data Augmentation
- Prompt of Automated Machine Labeling, Prompt of Data Augmentation의 실제 지시문
- Example of Fine-tuning Dataset: Input "Elevation of the main dam's cutoff wall crest is lower than the design elevation" → Output (HazardForm: Insufficient elevation, HazardComponent: Dam impervious body)

4 표 5. 단계별 위험 샘플 수
- 유형별 Sample size / Expert-corrected samples / Data augmentation, 합계 1,300 / 1,300 / 6,500

5 4.2.2 실험 구성과 평가 지표 [방법]
- 중국어 공학 텍스트 과제이므로 주로 중국어 말뭉치로 학습된 오픈소스 LLM 선택: DeepSeek-V3-671B, Qwen3-32B, GLM4-32B, Qwen3-14B, GLM4-9B, Qwen3-8B
- H800 80 GB GPU 8개, Python 3.10, CUDA 12.6, LLaMA-Factory로 미세조정, 양자화 미적용
- DeepSeek-V3-671B는 계산 자원과 데이터셋 규모의 한계로 미세조정하지 않고 기준 참고용으로만 사용
- 최대 학습률 5×10^-4, 에폭 7, 학습·검증·시험 7:1:2, 조기 종료(검증 손실이 여러 에폭 계속 증가하면 종료)
- "False"는 대상 개체가 식별되지 않은 출력 없음으로 간주
- 평가 지표: 매크로 평균 정밀도 Pmacro, 재현율 Rmacro, F1macro (식 12~14)
  - TPi: 실제 라벨이 i이고 올바르게 예측한 수, FPi: 실제 라벨이 다른 클래스인데 i로 예측한 수, FNi: 실제 라벨이 i인데 다른 클래스로 예측한 수

correctly predicted by the model, FP_i is the number of samples whose true labels belong to other classes but are incorrectly predicted as class i, and FN_i is the number of samples whose true labels are class i but are incorrectly predicted as other classes.

4.2.3. Experimental evaluation

(1) Fine-tuning performance evaluation

1 The fine-tuning results are shown in Fig. 6. To ensure comparability across different models and between the pre- and post-fine-tuning results, all models were evaluated using the same prompt template during inference, in which the complete set of candidate labels was provided. The temperature parameter was uniformly set to 0 to reduce the influence of random sampling on model outputs. From the baseline results, the overall recognition performance generally improves as the model parameter scale increases. DeepSeek-V3-671B achieves the best baseline performance in both class c_5 and class c_6. This indicates that ultra-large general-purpose LLMs have stronger basic capabilities in semantic understanding of dam hazard descriptions and fine-grained category discrimination without domain-specific fine-tuning. This result also supports the use of large-parameter models in the data pre-annotation stage of this study, as they can generate relatively high-quality candidate labels and thereby reduce the workload required for subsequent manual correction.

1 After fine-tuning, the fine-tuned models showed substantial improvements in both class c_5 and class c_6 recognition tasks, with $F1_{macro}$ increasing by approximately 26–34 percentage points compared with the baseline results. This indicates that domain-specific fine-tuning effectively improves the model's capability for hazard classification. Among the tested models, GLM4-32B achieved the best overall performance, with all three evaluation metrics approaching 90 % for class c_5 and also close to 90 % for class c_6. Qwen3-32B also achieved strong results after fine-tuning, although its metrics were slightly lower than those of GLM4-32B. In comparison, the 8B–14B models showed lower overall performance than the 32B models, but they require fewer computational resources and lower deployment costs, while still achieving relatively stable recognition results after fine-tuning. Therefore, in resource-constrained or cost-sensitive scenarios, 8B–14B models remain a practical option that balances performance and efficiency. For the subsequent experiments in this study, GLM4-32B was selected as the base model to ensure higher accuracy and stability in dam hazard entity recognition.

1 Further inspection of the prediction results shows that the remaining errors in class c_5 recognition are mainly associated with structural hazards. For structural hazards, the models tend to confuse fine-grained categories such as insufficient structural strength and structural instability. This is mainly because these categories are described in highly similar ways in engineering reports. Expressions such as "not satisfying specification requirements", "insufficient safety", and "inadequate bearing capacity" are frequently used, but the text does not always clearly indicate whether the problem refers to material- or member-level bearing capacity, or to the overall stability, sliding stability, or overturning stability of the structure. As a result, the models can generally identify such descriptions as structural safety problems, but still face difficulties in aligning them with the correct fine-grained hazard form. In contrast, the recognition results for class c_6 are relatively balanced across different categories, with no obvious performance bottleneck. This indicates that the models can identify dam components.

(2) Performance evaluation under different temperature parameters


3 Furthermore, we conducted voting experiments under temperature perturbations using the fine-tuned GLM4-32B and Qwen3-32B models. For the entity classification task, adjusting the temperature can influence output diversity. However, excessively high values may lead to overly divergent outputs and the generation of irrelevant content. In our experiments, six temperature values between 0 and 1 were tested, specifically $\mathcal{T} = \{0, 0.2, 0.4, 0.6, 0.8, 1.0\}$. The resulting performance variations of the models across these temperature settings are presented in Fig. 7.

3 The experimental results show that model performance under a single temperature setting fluctuates with changes in temperature, and the trends vary across models and recognition tasks. GLM4-32B maintains high overall performance in both the c5 and c6 tasks, but noticeable fluctuations occur at certain temperature settings, such as 0.4 and 0.6. In contrast, Qwen3-32B shows a slight overall decline in task performance as the temperature increases, suggesting that higher temperatures may affect output stability to some extent. Overall, the P, R, and F1 values obtained through multi-temperature voting are higher than those obtained under single-temperature settings across all experimental groups. This indicates that the voting strategy can effectively integrate model outputs under different temperature conditions and reduce the influence of single-inference errors on the final classification results, thereby improving the stability and overall performance of entity recognition.

3 In addition, the experiment further examined a cross-model hybrid voting strategy. Specifically, the predictions of Qwen3-32B and GLM4-32B under their relatively optimal temperature settings were selected, and the final labels were generated through majority voting. The results show that the overall performance of hybrid voting did not exceed that of the better-performing GLM4-32B model alone. A possible reason is that the overall prediction quality of Qwen3-32B was relatively lower, and its incorrect predictions may have weakened the decision advantage of GLM4-32B during voting. In addition, the two models may have shared similar confusion patterns for some fine-grained categories, preventing cross-model voting from forming effective complementarity.

(3) Ablation study.

4 The ablation study was conducted based on the GLM4-32B model to evaluate the contribution of the main components of OHCF. As shown in Table 6, fine-tuning provides the dominant performance gain, demonstrating its importance for adapting the model to the dam hazard classification task. The voting and consistency checking modules bring further but relatively modest improvements. Overall, the complete OHCF achieves the best performance for both c_5 and c_6 classification, with all evaluation metrics exceeding 90 %.

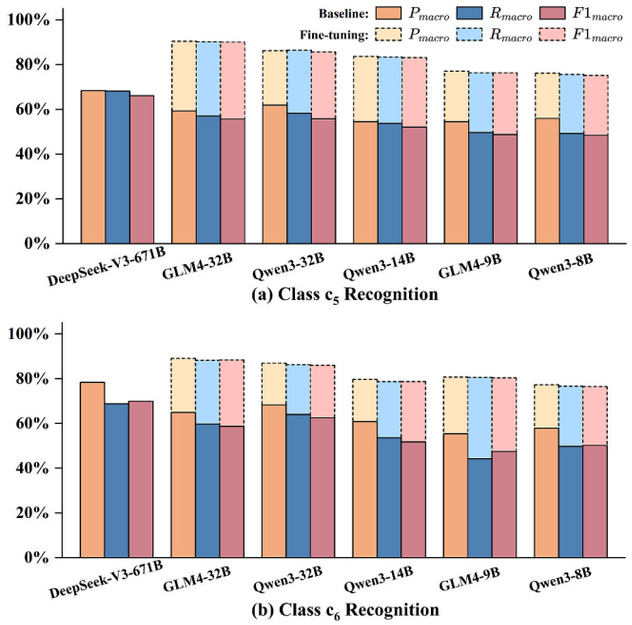

2 **Fig. 6.** Model performance before and after fine-tuning.


메모 (p.10)

1 4.2.3 (1) 미세조정 성능 평가 [결과]
- 비교 가능성을 위해 모든 모델을 후보 라벨 전체를 제공하는 같은 프롬프트로 평가하고 온도는 0으로 설정
- 기준 결과: 파라미터 규모가 커질수록 성능 향상, DeepSeek-V3-671B가 c5, c6 모두 가장 좋음
  - 초대형 범용 LLM이 미세조정 없이도 위험 서술의 의미 이해와 세밀한 범주 구별에 강한 기본 능력을 가짐 → 데이터 사전 주석 단계에서 대형 모델 사용을 뒷받침
- 미세조정 후: F1macro가 기준보다 약 26~34%p 증가
  - GLM4-32B가 가장 좋음 (c5 세 지표 모두 90% 근접, c6도 90% 가까움) → 이후 실험의 기본 모델
  - Qwen3-32B는 GLM4-32B보다 약간 낮음
  - 8B~14B 모델은 32B보다 낮지만 적은 자원과 낮은 배포 비용으로 실용적 선택지
- 남은 오류
  - c5: 주로 구조 위험에서 구조 강도 부족과 구조 불안정 같은 세밀한 범주를 혼동. "not satisfying specification requirements", "insufficient safety", "inadequate bearing capacity" 같은 표현이 자주 쓰이고, 재료·부재 수준의 지지력인지 전체·활동·전도 안정성인지 분명히 밝히지 않기 때문
  - c6: 범주 간 결과가 비교적 고르며 뚜렷한 병목 없음

2 그림 6. 미세조정 전후 모델 성능 [결과]
- 모델 6개의 Pmacro, Rmacro, F1macro 막대그래프, (a) Class c5 Recognition, (b) Class c6 Recognition
- 실선 막대: Baseline, 점선 막대: Fine-tuning

3 4.2.3 (2) 온도 파라미터별 성능 평가 [결과]
- 미세조정한 GLM4-32B와 Qwen3-32B로 온도 교란 투표 실험, T = {0, 0.2, 0.4, 0.6, 0.8, 1.0}
  - 온도 조정은 출력 다양성에 영향을 주지만, 지나치게 높으면 출력이 발산하고 관련 없는 내용이 생성될 수 있음
- 단일 온도 성능은 온도에 따라 변동하며 경향은 모델과 과제에 따라 다름
  - GLM4-32B: 높은 성능을 유지하나 0.4, 0.6에서 눈에 띄는 변동
  - Qwen3-32B: 온도가 높아질수록 성능이 약간 하락
- 다중 온도 투표의 P, R, F1이 모든 실험 그룹에서 단일 온도보다 높음 → 단일 추론 오류의 영향을 줄여 안정성과 전체 성능 향상
- 모델 간 혼합 투표(Qwen3-32B + GLM4-32B)는 GLM4-32B 단독을 넘지 못함
  - Qwen3-32B의 낮은 예측 품질이 GLM4-32B의 결정 우위를 약화시켰고, 두 모델이 일부 세밀한 범주에서 비슷한 혼동 패턴을 공유했을 수 있음

4 4.2.3 (3) 제거 실험 [결과]
- GLM4-32B 기반으로 OHCF 주요 구성요소의 기여 평가 (표 6)
- 미세조정이 지배적인 성능 향상을 제공
- 투표와 일관성 검사는 추가적이지만 비교적 작은 향상
- 완전한 OHCF가 c5, c6 모두 가장 좋고 모든 지표가 90% 초과

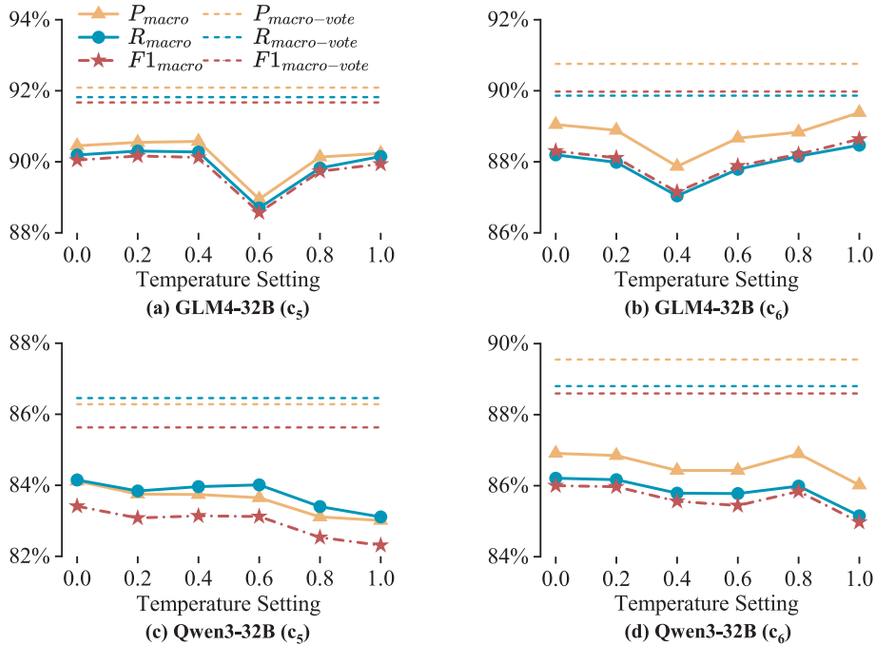

1 **Fig. 7.** Model performance under temperature perturbation and voting strategy.

2 **Table 6**
Ablation results of OHCF based on GLM4-32B.

	Class c_5 Classification			Class c_6 Classification		
	P_{macro}	R_{macro}	$F1_{macro}$	P_{macro}	R_{macro}	$F1_{macro}$
Baseline	59.29 %	57.06 %	55.65 %	64.88 %	59.69 %	58.66 %
w/o Voting & Consistency checking	90.45 %	90.19 %	90.04 %	89.05 %	88.20 %	88.30 %
w/o Consistency Checking	92.09 %	91.82 %	91.67 %	90.76 %	89.86 %	89.98 %
OHCF	93.26 %	93.01 %	92.87 %	91.55 %	90.62 %	90.76 %

4.3. Construction and retrieval application of DDKG

4.3.1. DDKG construction and visualization

3 Based on the experimental results, the fine-tuned GLM4-32B model was adopted as the backbone of OHCF and applied to all hazard description texts. The data layer entities associated with each engineering instance were organized into independent JSON files and batch-imported into the Neo4j graph database using Python scripts. In total, the constructed DDKG contained 201,362 nodes and 953,447 relationships. The number of nodes associated with each top-level class is listed in Table 7. Parameter nodes account for a relatively large proportion because each dam instance is described by multiple engineering and hydrological indicators, including dam height, reservoir capacity, and characteristic water levels.

5 Fig. 8 illustrates the main knowledge structure of the DDKG. Each dam instance is semantically mapped to its corresponding entity node. Under the semantic constraints defined in the dam domain ontology (DDO), each dam engineering entity is connected to its associated attribute, evaluation, hazard-form, and hazard-component entities. These entities can be further traced upward along the ontology hierarchy to establish multi-level semantic associations with their parent nodes (e.g., Dam → c_5(5,2,2) ← c_5(5,2) ← c_5(5)). In addition, engineering entities can be topologically connected across different projects through shared entity nodes. For example, two dam instances in Fig. 8 are associated through common nodes such as “River Basin: Pearl River Basin”, “Scale: Small”, and “Dam type: Homogeneous Earth Dam”. This interconnected structure provides a robust foundation for advanced tasks such as clustering analysis of dam hazard knowledge and knowledge reasoning.

4 **Table 7**
Number of nodes associated with each top-level class.

c_i	Entity class	Quantity
c_1	Dam	22,076
c_2	Properties	58
c_3	Location	1,922
c_4	Parameter	76,152
c_5	HazardForm	73
c_6	HazardComponent	44
c_7	SafetyEvaluation	15
Total		100,340

4.3.2. Example of multi-constraint retrieval

6 The core function of KGs lies in efficient knowledge retrieval. By constraining key entity nodes, the DDKG can retrieve the distribution of engineering hazards under specific boundary conditions. Fig. 9 illustrates the retrieval of structural safety hazards under multiple constraints. This retrieval involves three fixed constraints: Yangtze River Basin (River_Basin), embankment dam (Dam_Type), and medium (Scale). These constraints restrict the search scope to all dam projects corresponding to this combination. Within the defined sample pool, hazard nodes associated with these projects are traced via the (:Dam)-[:exhibitsHazards]->(:HazardForm) relationship. At the same time, constraints on hazard forms are constructed based on the hierarchical structure under the top-level class c_5:HazardForm in the DDO: (:HazardForm {node_name:'Structure'})-[:hasSubclass*0..]->(: HazardForm). This strictly limits the retrieval to the “Structure Hazards” node and all

메모 (p.11)

1 그림 7. 온도 교란과 투표 전략 하의 모델 성능 [결과]
- x축: Temperature Setting, 실선: 단일 온도의 Pmacro, Rmacro, F1macro, 점선: 투표 결과(macro-vote)
- (a) GLM4-32B c5, (b) GLM4-32B c6, (c) Qwen3-32B c5, (d) Qwen3-32B c6


2 표 6. GLM4-32B 기반 OHCF 제거 실험 결과
- Baseline / w/o Voting & Consistency checking / w/o Consistency Checking / OHCF
- c5 F1macro: 55.65 → 90.04 → 91.67 → 92.87%
- c6 F1macro: 58.66 → 88.30 → 89.98 → 90.76%

3 4.3.1 DDKG 구축과 시각화 [결과]
- 미세조정한 GLM4-32B를 OHCF의 기반 모델로 모든 위험 서술 텍스트에 적용
- 각 공학 인스턴스의 데이터 계층 개체를 독립된 JSON 파일로 정리하여 Python 스크립트로 Neo4j에 일괄 입력
- DDKG: 노드 201,362개, 관계 953,447개 (최상위 클래스별 노드 수 표 7)
- 각 댐이 댐 높이, 저수 용량, 특성 수위 등 여러 공학·수문 지표로 기술되어 Parameter 노드 비중이 큼


4 표 7. 최상위 클래스별 노드 수
- Dam 22,076 / Properties 58 / Location 1,922 / Parameter 76,152 / HazardForm 73 / HazardComponent 44 / SafetyEvaluation 15 / Total 100,340
- 본문의 전체 노드 수(201,362)와 표 합계가 다름

5 그림 8 설명 (본문)
- 각 댐 인스턴스는 대응하는 개체 노드에 대응되며, DDO의 의미 제약 아래 속성, 평가, 위험 형태, 위험 부위 개체와 연결
- 개체는 온톨로지 계층을 따라 상위 노드와 다단계 의미 연관을 형성 (예: Dam → c5(5,2,2) ← c5(5,2) ← c5(5))
- 서로 다른 댐이 공유 개체 노드로 위상적으로 연결 (예: "River Basin: Pearl River Basin", "Scale: Small", "Dam type: Homogeneous Earth Dam")
- 이 구조는 댐 위험 지식의 군집 분석과 지식 추론 같은 고급 과제의 기반

6 4.3.2 다중 제약 검색의 예 [결과]
- KG의 핵심 기능은 효율적인 지식 검색이며, 핵심 개체 노드에 제약을 걸어 특정 경계 조건에서의 위험 분포를 검색 (그림 9)
- 세 고정 제약: Yangtze River Basin(River_Basin), embankment dam(Dam_Type), medium(Scale) → 해당 조합의 모든 댐으로 검색 범위 제한
- (:Dam)-[:exhibitsHazards]->(:HazardForm) 관계로 위험 노드 추적
- DDO의 c5 계층 구조로 위험 형태 제약: (:HazardForm {node_name:'Structure'})-[:hasSubclass*0..]->(:HazardForm) → "Structure Hazards" 노드와 그 재귀적 하위 클래스로 제한

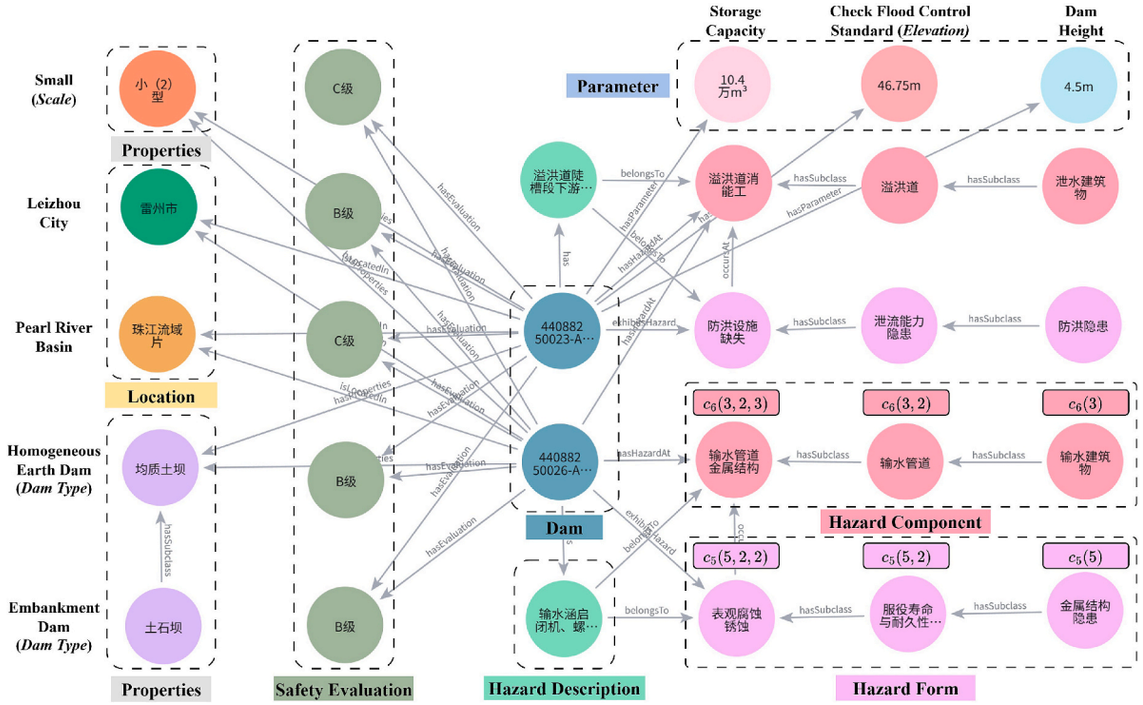

2 **Fig. 8.** Visualization of the main DDKG structure.

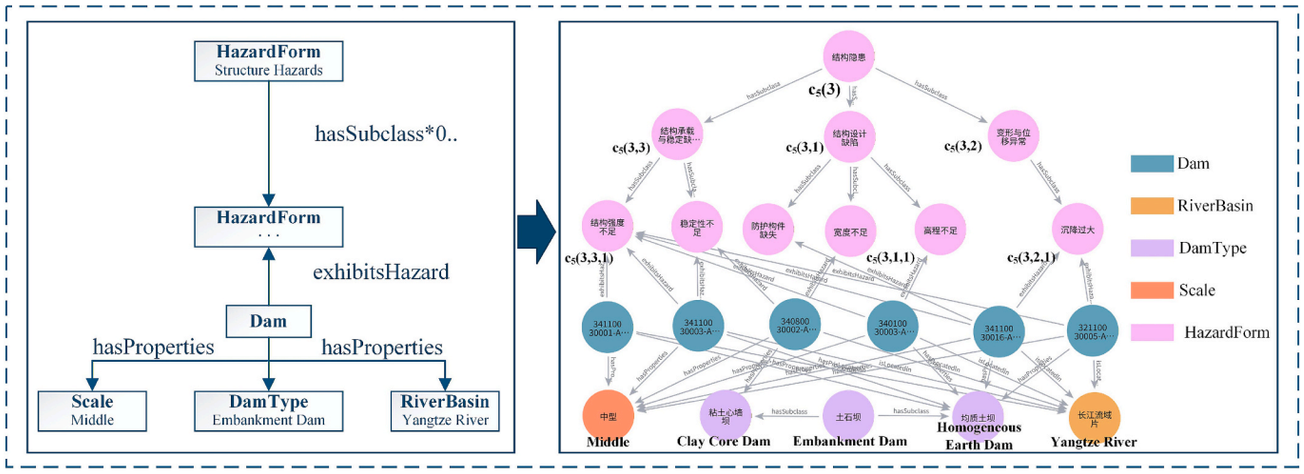

3 **Fig. 9.** Example of Structural Hidden Danger Knowledge Retrieval.

1 its recursive subclasses.

1 The DDKG, as a structured knowledge base, organizes originally scattered information on river basins, dam types, and defective and dangerous dam hazards into an ordered network through entity and relationship links. In this way, complex retrieval and reasoning tasks—such as multi-conditional filtering or cross-node risk tracing—can be performed based on graph paths, rather than simple text matching.

4.4. DDKG-based analysis of dam defects in the Yangtze River Basin

4 This section takes dam projects in the Yangtze River Basin as the research object and conducts a case analysis of dam safety defects. The purpose is to further verify the application potential and value of the DDKG in engineering defect analysis and decision-support tasks.

4 In practical engineering, a Grade-C result in a specific safety evaluation category indicates that the project has relatively serious safety defects in that category. To identify the major safety weaknesses of dam projects in the Yangtze River Basin, the occurrence frequencies and co-occurrence frequencies of different Grade-C safety evaluation indicators were statistically analyzed, as shown in Fig. 10. In the figure, $c_7(1)$, $c_7(2)$, $c_7(3)$, $c_7(4)$, and $c_7(5)$ represent flood-control safety, seepage safety, structural safety, seismic safety, and metal-structure safety evaluations, respectively. The diagonal values indicate the occurrence frequency of each Grade-C safety evaluation indicator.

4 From the perspective of individual safety evaluation results, Grade-C problems in dam projects of the Yangtze River Basin are mainly concentrated in seepage safety, structural safety, and flood-control safety. Among them, seepage safety has the highest Grade-C occurrence frequency, indicating that seepage-related defects are the most

메모 (p.12)

1 4.3.2 (이어서)

- DDKG는 흩어져 있던 유역, 댐 형식, 결함·위험 댐의 위험 정보를 개체와 관계 연결을 통해 질서 있는 네트워크로 조직
- 다중 조건 필터링이나 노드 간 리스크 추적 같은 복잡한 검색·추론을 단순 텍스트 매칭이 아니라 그래프 경로를 바탕으로 수행

2 그림 8. DDKG 주요 구조 시각화 [결과]

- 두 Dam 노드가 Properties(Scale, Dam Type), Location(Leizhou City, Pearl River Basin), Safety Evaluation, Parameter(Storage Capacity, Check Flood Control Standard, Dam Height), Hazard Description, Hazard Form, Hazard Component 노드와 연결
- Hazard Form, Hazard Component 노드는 hasSubclass로 상위 클래스(c5(5,2,2) ← c5(5,2) ← c5(5), c6(3,2,3) ← c6(3,2) ← c6(3))까지 연결

3 그림 9. 구조 위험 지식 검색의 예 [결과]

- 왼쪽: 검색 구조. Dam이 hasProperties로 Scale(Middle), DamType(Embankment Dam), RiverBasin(Yangtze River)에 연결, Dam -exhibitsHazard→ HazardForm ← hasSubclass*0.. ← HazardForm(Structure Hazards)
- 오른쪽: 검색 결과. 조건을 만족하는 Dam 노드들과 구조 위험 하위 클래스(c5(3), c5(3,1), c5(3,2), c5(3,3) 등) 노드

4 4.4 양쯔강 유역 댐 결함 분석 [결과]

- 양쯔강 유역 댐을 대상으로 사례 분석하여 결함 분석과 의사결정 지원에서 DDKG의 응용 잠재력과 가치를 검증
- 특정 안전평가 범주의 C등급은 해당 범주에서 비교적 심각한 안전 결함이 있음을 의미
- 주요 안전 취약점 식별을 위해 C등급 안전평가 지표의 발생 빈도와 동시 발생 빈도를 통계 분석 (그림 10)
  - c7(1)~c7(5): 홍수 방어, 침투, 구조, 내진, 금속 구조 안전평가, 대각선 값: 각 지표의 발생 빈도
- C등급 문제는 주로 침투, 구조, 홍수 방어 안전에 집중되며, 침투 안전의 발생 빈도가 가장 높음

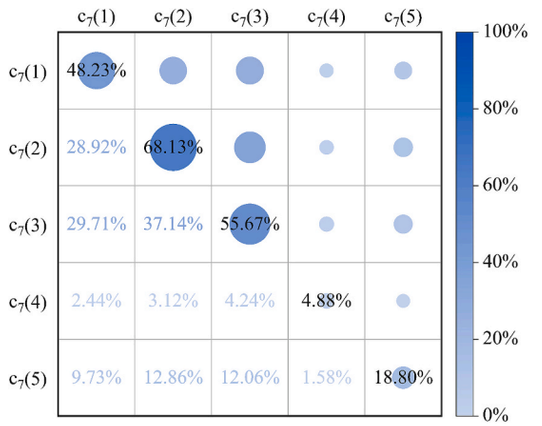


Fig. 10. Occurrence and co-occurrence frequencies of Grade-C safety evaluation indicators in the Yangtze River Basin.

prominent weakness in the safety evaluation of dam projects in this basin. The Grade-C occurrence frequencies of structural safety and flood-control safety are also relatively high, reaching 55.67 % and 48.23 %, respectively. This suggests that dams in the Yangtze River Basin commonly face problems such as structural aging, insufficient seepage-control capacity, and inadequate flood-control capacity during long-term operation. In contrast, metal-structure safety defects and seismic defects are not the dominant problems for dam projects in the Yangtze River Basin.

4.4.1. Analysis of seepage–structure compound defects

The co-occurrence analysis of Grade-C safety evaluation indicators shows a relatively strong association between seepage defects and structural defects in the Yangtze River Basin. To further identify the specific defect combinations underlying this association, the top five co-occurrence patterns of severe seepage and structural defects were extracted, as shown in Table 8.

It can be seen that seepage leakage "c_5(2,2,1)" in conveyance culverts "c_6(3,2,1)" has the highest co-occurrence probability with insufficient structural strength "c_5(3,3,1)". This combination represents the most typical seepage–structure compound defect in the Yangtze River Basin. In early earth-rockfill dams, conveyance culverts were mostly embedded within the dam body and were commonly built as masonry structures. Their material properties differ markedly from those of the surrounding dam-fill materials, making it difficult to maintain coordinated seepage deformation and stress deformation. As a result, concentrated seepage paths are likely to develop along the contact zones between the culvert and the dam body. Long-term seepage erosion may not only weaken the seepage stability of these contact zones, but also accelerate the deterioration of the masonry culvert structure. This may reduce structural strength and further induce or aggravate culvert leakage.

In addition, seepage leakage c5(2,2,1) in dam foundations c6(1,1,3) is also likely to be coupled with structural instability defects. Long-term foundation seepage may cause soil loss or local erosion at the contact zones between the dam foundation and the dam body, thereby weakening the supporting conditions of the dam. This process may induce excessive settlement c5(3,2,1) of dam slopes c6(1,1,6), and may even develop into overall sliding instability c5(3,3,2). Meanwhile, uneven settlement of the dam body or foundation may also adversely affect auxiliary structures such as the spillway c6(2,1,1), leading to structural cracking or deformation at contact zones, which may further induce seepage problems.

Therefore, seepage anomalies may weaken the stability conditions of the dam body and foundation, while long-term seepage action may further accelerate structural deterioration and local damage. Conversely, structural defects can also aggravate seepage problems by inducing cracking, deformation, or contact-zone failure, and may further affect the overall flood-control capacity and operational safety of the project. These results indicate that seepage and structural defects in the Yangtze River Basin are not independent problems, but are often coupled and mutually reinforcing. Therefore, safety diagnosis and reinforcement measures should focus on the combined effects of seepage control, structural stability, and component integrity, rather than treating seepage and structural defects as isolated issues.

Table 8
Top five co-occurrence combinations of seepage and structural defects.

No.	Seepage Hazards		Structure Hazards		Co-occurrence Frequency
	Class c_5	Class c_6	Class c_5	Class c_6	
1	c_5(2,2,1)	c_6(3,2,1)	c_5(3,3,1)	c_6(3,2,1)	13.99 %
2	c_5(2,2,1)	c_6(1,1,3)	c_5(3,3,2)	c_6(1,1,6)	13.83 %
3	c_5(2,2,1)	c_6(1,1,3)	c_6(1,1,6)	c_6(2,1,1)	13.55 %
4	c_5(2,2,1)	c_6(1,1,3)	c_5(3,2,1)	c_6(1,1,6)	12.96 %
5	c_5(2,2,1)	c_6(1,1,3)	c_5(3,3,1)	c_6(3,2,1)	10.57 %

4.4.2. Flood control hazard analysis of embankment dams

Flood control and disaster mitigation are among the primary functions of reservoir dams. For embankment dams, insufficient flood-control capacity may directly increase the risk of overtopping and threaten the overall safety of the dam.

Fig. 11 depicts the frequency distribution of various flood control hazard forms for embankment dams of different project scales in the Yangtze River Basin. Panels (a), (b), and (c) correspond to small, medium, and large projects, respectively. The occurrence frequency of each flood control hazard was calculated using Equation (15):

$$P\left(c_5(1,j_2,j_3)|\lambda_k,\Omega\right)=\frac{N_{dam}\left(c_5(1,j_2,j_3)\cap\lambda_k\cap\Omega\right)}{N_{dam}(\lambda_k\cap\Omega)}\times 100\% \tag{15}$$

where λ_k is the project scale, with k = 1, 2, and 3 corresponding to small, medium, and large projects, respectively; Ω is the constraint set ({Yangtze River Basin (River_Basin), embankment dam (Dam_Type)}; $N_{dam}(\lambda_k\cap\Omega)$ is the number of dams with "project scale = λ_k & Ω"; and $N_{dam}\left(c_5(1.j_2,j_3)\cap\lambda_k\cap\Omega\right)$ is the number of dams with "flood control hazard exists $c_5(1.j_2,j_3)$ & project scale = λ_k & Ω."

Overall, "c_5(1,2) Insufficient freeboard of water-retaining structures" and "c_5(1,3) Discharge capacity hazards" emerge as the most critical flood control hazards. Within these categories, "c_5(1,2,1) Insufficient dam crest elevation" and "c_5(1,3,2) Insufficient discharge capacity of the spillway" are the most frequently occurring specific hazard forms.

Small-scale projects are more prone than medium- and large-scale projects to issues such as "c_5(1,1,2) Insufficient design flood standard" and "c_5(1,2,1) Insufficient dam crest elevation." This reflects the limitations of small reservoirs, which—constrained by lower fortification standards and limited technical investment during earlier construction periods— not only struggle to meet current design codes in terms of technical parameters but also lack sufficient structural height margins to safely accommodate extreme conditions.

The occurrence frequency of "c_5(1,3,2) Insufficient discharge capacity" increases with project scale. Compared with small-scale projects, medium- and large-scale projects generally face greater flood pressures and more complex flood routing processes. These characteristics place higher demands on the discharge capacity of hydraulic structures, the efficiency of operational response, and the coordination of the overall flood release system. As a result, mismatches between discharge capacity and actual flood control demands are more likely to occur in larger projects.

In small projects, although insufficient discharge capacity is relatively less prominent, "c_5(1,3,1) Missing flood control facilities" is more severe. This is mainly because some small reservoirs have remained empty for many years owing to prolonged periods without inflow. Under

메모 (p.13)

1 4.4 (이어서) [결과]

- 침투 관련 결함이 이 유역 댐 안전평가의 가장 두드러진 취약점
- 구조 안전 55.67%, 홍수 방어 안전 48.23%로 C등급 발생 빈도가 비교적 높음
- 장기 운영 중 구조 노후화, 침투 방지 능력 부족, 홍수 방어 능력 부족 같은 문제를 공통적으로 겪음을 시사
- 금속 구조와 내진 결함은 주된 문제가 아님

2 그림 10. C등급 안전평가 지표의 발생·동시 발생 빈도 [결과]

- 5×5 행렬, 행·열: c7(1)~c7(5)
- 대각선: 각 지표의 C등급 발생 빈도(48.23%, 68.13%, 55.67%, 4.88%, 18.80%), 대각선 아래: 동시 발생 빈도
- 원의 크기와 색의 진하기로 빈도를 표시

3 4.4.1 침투-구조 복합 결함 분석 [결과, 논의]

- C등급 동시 발생 분석에서 침투 결함과 구조 결함 사이에 비교적 강한 연관 → 심각한 침투·구조 결함의 상위 5개 동시 발생 패턴 추출 (표 8)
- 도수 암거 c6(3,2,1)의 침투 누수 c5(2,2,1)이 구조 강도 부족 c5(3,3,1)과 동시 발생 확률이 가장 높음 → 양쯔강 유역의 가장 전형적인 침투-구조 복합 결함
  - 초기 흙·사력댐의 도수 암거는 대부분 댐 본체에 매설된 조적 구조로, 재료 특성이 주변 성토 재료와 달라 침투 변형과 응력 변형의 조화를 유지하기 어려움 → 접촉부를 따라 집중 침투 경로 발생 → 장기 침투 침식이 침투 안정성을 약화시키고 조적 암거의 열화를 가속 → 구조 강도 저하와 누수 유발·악화
- 댐 기초 c6(1,1,3)의 침투 누수 c5(2,2,1)도 구조 불안정 결함과 결합되기 쉬움
  - 장기 기초 침투 → 접촉부의 토사 유실·국부 침식 → 지지 조건 약화 → 댐 사면 c6(1,1,6)의 과다 침하 c5(3,2,1), 전체 활동 불안정 c5(3,3,2)
  - 부등 침하는 여수로 c6(2,1,1) 같은 부속 구조물의 균열·변형을 일으키고 다시 침투 문제를 유발
- 침투 이상은 안정 조건을 약화시키고 구조 열화를 가속하며, 반대로 구조 결함도 균열·변형·접촉부 파괴로 침투를 악화
- 침투와 구조 결함은 독립된 문제가 아니라 결합되어 서로를 강화 → 안전 진단과 보강은 침투 제어, 구조 안정성, 구성요소 무결성의 결합 효과에 초점을 맞춰야 함

4 표 8. 침투·구조 결함의 상위 5개 동시 발생 조합

- 5개 조합 모두 침투 위험 c5(2,2,1)을 포함, 동시 발생 빈도 13.99%~10.57%

5 4.4.2 필댐의 홍수 방어 위험 분석 [결과, 논의]

- 필댐은 홍수 방어 능력이 부족하면 월류 위험이 직접 높아지고 댐 전체 안전을 위협
- 양쯔강 유역 필댐의 규모별 홍수 방어 위험 형태 빈도 분포 (그림 11, (a) 소형, (b) 중형, (c) 대형)
- 식 (15): P(c5(1,j2,j3) | λk, Ω) = Ndam(c5(1,j2,j3) ∩ λk ∩ Ω) / Ndam(λk ∩ Ω) × 100%
  - λk: 댐 규모(k = 1, 2, 3: 소형, 중형, 대형), Ω: 제약 집합 {Yangtze River Basin, embankment dam}
- 가장 중대한 홍수 방어 위험: c5(1,2) 차수 구조물 여유고 부족, c5(1,3) 방류 능력 위험
- 가장 자주 발생하는 위험 형태: c5(1,2,1) 댐 마루 표고 부족, c5(1,3,2) 여수로 방류 능력 부족
- 소형 댐: c5(1,1,2) 설계 홍수 기준 부족, c5(1,2,1) 댐 마루 표고 부족이 더 많음 → 초기 건설 시 낮은 방호 기준과 제한된 기술 투자로 현행 설계 기준을 맞추기 어렵고 극한 조건을 수용할 높이 여유가 부족
- c5(1,3,2) 방류 능력 부족: 규모가 클수록 증가 → 큰 홍수 압력과 복잡한 홍수 추적 과정으로 방류 능력, 운영 대응 효율, 방류 체계 조정의 요구가 높아 불일치가 생기기 쉬움
- 소형 댐: c5(1,3,1) 홍수 방어 시설 누락이 더 심각 → 오랜 기간 유입이 없어 여러 해 빈 상태로 남은 소형 저수지가 있기 때문

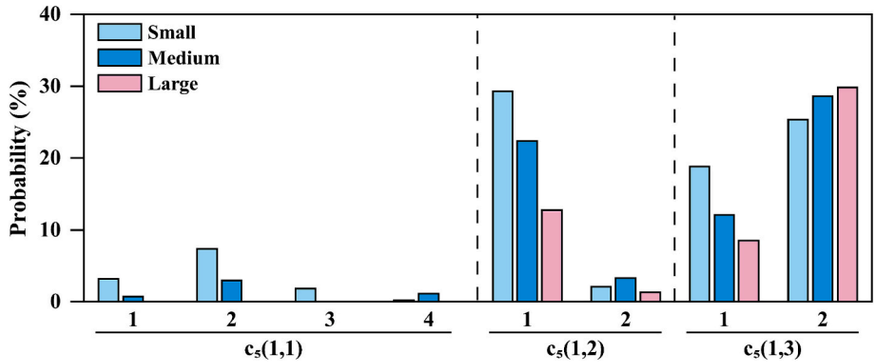


Fig. 11. Frequency distribution of flood control hazard forms.

such conditions, their original water release or conveyance facilities may gradually fall into disuse and become inoperative, leading to a substantial weakening of flood control function. Although these reservoirs may currently have little practical need for discharge, the associated risk should not be overlooked. Once a flood event occurs, the reservoir may rapidly shift from an empty state to an impounding state. In the absence of functional flood release facilities, inflow cannot be discharged in time, which greatly increases the risk of overtopping and, in severe cases, dam failure.

In summary, the DDKG provides a structured basis for multi-dimensional dam hazard analysis. The Yangtze River Basin case study shows that hazard information can be retrieved and compared by basin, dam type, project scale, hazard type, and affected component. This demonstrates the potential of the DDKG to support regional dam safety analysis and management decision-making.

5. Conclusion and future work

To address the underutilization of unstructured text data in the dam safety domain and the challenges of knowledge adaptation when applying general-purpose LLMs to specialized fields, this study proposes a KG construction method that integrates a domain knowledge ontology with LLMs. The main contributions of this research are as follows:

(1) A dam defects ontology (DDO) was developed to provide a structured representation framework for dam hazard knowledge. In particular, the classes of hazard forms and affected components were refined to support fine-grained modeling of dam defects.

(2) An Ontology-guided Hazard Classification Framework (OHCF) was proposed for standardizing unstructured hazard descriptions. By integrating fine-tuning, temperature-perturbed voting, ontology-constraint consistency checking, and expert validation, OHCF improves the reliability of hazard classification and provides structured inputs for KG construction.

(3) Based on the proposed method, a dam defects knowledge graph (DDKG) was constructed using safety appraisal reports from 22,076 dams. The case study shows that the DDKG can support multi-constraint retrieval and regional hazard analysis, demonstrating its potential value for dam safety management.

Despite these contributions, the proposed method has limitations that will be addressed in future work:

(1) The application of the DDKG in this study remains preliminary, focusing mainly on a single large-scale regional analysis. Future research will further expand its application to more refined spatial-scale and project-level hazard analyses, to reveal regional differences in hazard distribution and provide more targeted support for dam safety management.

(2) At present, the DDKG is a static knowledge base, as its hazard information is derived from historical evaluation reports. Future work will incorporate temporal data and explore automated update methods to transform the DDKG into a dynamic, evolving system.

(3) Although this study evaluates hazard knowledge extraction and includes expert validation, the constructed knowledge graph itself still requires systematic assessment. Future research will examine its structural properties, completeness, consistency, and practical effectiveness in supporting dam defect analysis and engineering decision-making.

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the author(s) used Gemini 2.5 in order to improve the language and readability. After using this tool/service, the author(s) reviewed and edited the content as needed and take(s) full responsibility for the content of the published article.

CRediT authorship contribution statement

Jianfeng Huang: Writing – review & editing, Writing – original draft, Visualization, Validation, Methodology, Investigation, Formal analysis, Conceptualization. **Wenang Hou:** Writing – review & editing, Supervision, Project administration, Funding acquisition, Data curation. **Shichen Zhang:** Writing – review & editing, Supervision, Project administration, Funding acquisition, Conceptualization. **Zhenhan Du:** Visualization, Investigation, Data curation. **Jiangshan Yin:** Validation, Formal analysis.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

This work was supported by the National Key Research and Development Program of China (Grant No. 2024YFC3210700), and the Central Public-interest Scientific Institution Basal Research Fund (Grant Nos. Y724007, Y724010).

Data availability

The data that has been used is confidential.

References

[1] I. Zamarrón-Mieza, V. Yepes, J.M. Moreno-Jiménez, A systematic review of application of multi-criteria decision analysis for aging-dam management, J. Clean. Prod. 147 (2017) 217–230, https://doi.org/10.1016/j.jclepro.2017.01.092.
[2] J. Liu, F. Wang, X. Wang, Z. Hu, C. Liang, Temperature monitoring and cracking risk analysis of corridor top arch of baihetan arch dam during construction period,

메모 (p.14)

1 4.4.2 (이어서) [논의]

- 이런 조건에서 방류·도수 시설이 방치되어 작동하지 않게 되고 홍수 방어 기능이 크게 약화
- 현재 방류 필요가 거의 없어도, 홍수 시 빈 상태에서 저류 상태로 빠르게 바뀌며, 방류 시설이 없으면 유입량을 제때 방류하지 못해 월류, 심하면 댐 붕괴 위험
- 요약: DDKG는 다차원적 댐 위험 분석의 구조화된 기반을 제공하며, 유역, 댐 형식, 규모, 위험 유형, 영향 부위별로 위험 정보를 검색·비교할 수 있어 지역 댐 안전 분석과 관리 의사결정을 지원할 잠재력이 있음

2 그림 11. 홍수 방어 위험 형태의 빈도 분포 [결과]

- (a) 소형, (b) 중형, (c) 대형 필댐별 홍수 방어 위험 형태 c5(1,·,·)의 발생 빈도

5. 결론과 향후 연구 [목표, 차이]

- 댐 안전 분야에서 비정형 텍스트 데이터가 충분히 활용되지 않는 문제와, 범용 LLM을 전문 분야에 적용할 때의 지식 적응 문제를 해결하기 위해 도메인 지식 온톨로지와 LLM을 통합한 KG 구축 방법을 제안

3 주요 기여

1. 댐 위험 지식의 구조화된 표현 틀인 DDO 개발, 위험 형태와 영향 부위 클래스를 정교화하여 댐 결함의 세밀한 모델링 지원
2. 비정형 위험 서술 표준화를 위한 OHCF 제안, 미세조정·온도 교란 투표·온톨로지 제약 일관성 검사·전문가 검증을 통합하여 위험 분류의 신뢰성을 높이고 KG 구축을 위한 구조화된 입력 제공
3. 22,076개 댐의 안전 감정 보고서로 DDKG 구축, 다중 제약 검색과 지역 위험 분석을 지원할 수 있음을 보임

4 한계와 향후 연구 [논의]

1. DDKG의 응용이 초기 단계로 단일 대규모 지역 분석에 집중 → 더 세밀한 공간 규모와 개별 댐 수준의 위험 분석으로 확장
2. 과거 평가 보고서에서 나온 정적 지식 베이스 → 시간 데이터를 통합하고 자동 갱신 방법을 탐색하여 동적 시스템으로
3. 위험 지식 추출은 평가하고 전문가 검증을 포함했으나, 구축된 지식그래프 자체는 체계적 평가가 필요 → 구조적 특성, 완전성, 일관성, 댐 결함 분석과 의사결정 지원에서의 실질적 효과 검토

Eng. Fail. Anal. 167 (2025) 108903, https://doi.org/10.1016/j.engfailanal.2024.108903.
[3] P. Bu, Y. Li, W. Tang, X. Chen, B. Li, Semi-quantitative risk analysis of high concrete face rockfill dams under seismic action, Structures 45 (2022) 685–694, https://doi.org/10.1016/j.istruc.2022.09.013.
[4] Y. Liu, D. Zheng, E. Cao, X. Wu, Z. Chen, Cracking risk analysis of face slabs in concrete face rockfill dams during the operation period, Structures 40 (2022) 621–632, https://doi.org/10.1016/j.istruc.2022.04.054.
[5] J. Wang, Z. Zhang, Y. Huang, H. Hu, Proactive dispatch of rail maintenance equipment under weather-induced disruptions: an optimization framework integrating machine learning-driven risk assessment, Adv. Eng. Inform. 69 (2026) 103990, https://doi.org/10.1016/j.aei.2025.103990.
[6] X. Huo, Y. Yin, L. Jiao, Y. Zhang, A data-driven and knowledge graph-based analysis of the risk hazard coupling mechanism in subway construction accidents, Reliab. Eng. Syst. Saf. 250 (2024) 110254, https://doi.org/10.1016/j.ress.2024.110254.
[7] S. Fu, Q. Tang, M. Zhang, B. Han, Z. Wu, W. Mao, A data-driven framework for risk and resilience analysis in maritime transportation systems: a case study of domino effect accidents in arctic waters, Reliab. Eng. Syst. Saf. 260 (2025) 111049, https://doi.org/10.1016/j.ress.2025.111049.
[8] M. Marzouk, M. Enaba, Text analytics to analyze and monitor construction project contract and correspondence, Autom. Constr. 98 (2019) 265–274, https://doi.org/10.1016/j.autcon.2018.11.018.
[9] S. Ji, S. Pan, E. Cambria, P. Marttinen, P.S. Yu, A survey on knowledge graphs: Representation, acquisition and applications, IEEE Trans. Neural Netw. Learn. Syst. 33 (2022) 494–514, https://doi.org/10.1109/TNNLS.2021.3070843.
[10] D.W. Otter, J.R. Medina, J.K. Kalita, A survey of the usages of deep learning for natural language processing, IEEE Trans. Neural Netw. Learn. Syst. 32 (2021) 604–624, https://doi.org/10.1109/TNNLS.2020.2979670.
[11] M. Shim, H. Choi, H. Koo, K. Um, K.-H. Lee, S. Lee, OmEGa(Ω): Ontology-based information extraction framework for constructing task-centric knowledge graph from manufacturing documents with large language model, Adv. Eng. Inform. 64 (2025) 103001, https://doi.org/10.1016/j.aei.2024.103001.
[12] Y. Duan, Y. Tian, S. Ghosh, V. Venugopal, J. Chen, E.A. Olivetti, LLM-empowered literature mining for material substitution studies in sustainable concrete, Resour. Conserv. Recycl. 221 (2025) 108379, https://doi.org/10.1016/j.resconrec.2025.108379.
[13] W.X. Zhao, K. Zhou, J. Li, T. Tang, X. Wang, Y. Hou, Y. Min, B. Zhang, J. Zhang, Z. Dong, Y. Du, C. Yang, Y. Chen, Z. Chen, J. Jiang, R. Ren, Y. Li, X. Tang, Z. Liu, P. Liu, J.-Y. Nie, J.-R. Wen, A survey of large language models, (2025). https://doi.org/10.48550/arXiv.2303.18223.
[14] Q. Dong, L. Li, D. Dai, C. Zheng, J. Ma, R. Li, H. Xia, J. Xu, Z. Wu, T. Liu, B. Chang, X. Sun, L. Li, Z. Sui, A survey on in-context learning, (2024). https://doi.org/10.48550/arXiv.2301.00234.
[15] J. Zhou, T. Lu, S. Mishra, S. Brahma, S. Basu, Y. Luan, D. Zhou, L. Hou, Instruction-following evaluation for large language models, (2023). https://doi.org/10.48550/arXiv.2311.07911.
[16] J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. Chi, Q. Le, D. Zhou, Chain-of-thought prompting elicits reasoning in large language models, (2023). https://doi.org/10.48550/arXiv.2201.11903.
[17] LLM-based framework for bearing fault diagnosis, Mech. Syst. Signal Process. 224 (2025) 112127, https://doi.org/10.1016/j.ymssp.2024.112127.
[18] T.R. Gruber, A translation approach to portable ontology specifications, Knowl. Acquis. 5 (1993) 199–220, https://doi.org/10.1006/knac.1993.1008.
[19] X. Huang, C. Yang, Y. Zhang, S. Lou, L. Kong, H. Zhou, Ontology guided multi-level knowledge graph construction and its applications in blast furnace ironmaking process, Adv. Eng. Inform. 62 (2024) 102927, https://doi.org/10.1016/j.aei.2024.102927.
[20] D. Zhang, G. Ma, T. Qu, X. Wang, W. Zhou, X. Wang, A knowledge graph-enhanced large language model for question answering of hydraulic structure safety management, Adv. Eng. Inform. 66 (2025) 103468, https://doi.org/10.1016/j.aei.2025.103468.
[21] B.-L. Gan, D.-M. Zhang, Z.-K. Huang, F.-Y. Zheng, R. Zhu, W. Zhang, Ontology-driven knowledge graph for decision-making in resilience enhancement of underground structures: Framework and application, Tunn. Undergr. Space Technol. 163 (2025) 106739, https://doi.org/10.1016/j.tust.2025.106739.
[22] X. Liu, H. Lu, H. Li, Intelligent generation method of emergency plan for hydraulic engineering based on knowledge graph – take the south-to-north water diversion project as an example, LHB 108 (2022) 2153629, https://doi.org/10.1080/27678490.2022.2153629.
[23] Y. Zhou, T. Bao, X. Shu, Y. Li, Y. Li, BIM and ontology-based knowledge management for dam safety monitoring, Autom. Constr. 145 (2023) 104649, https://doi.org/10.1016/j.autcon.2022.104649.
[24] C. Baudrit, F. Taillandier, C. Curt, Q.A. Hoang, Z.-M. Sbartaï, D. Breysse, Graph based knowledge models for capitalizing, predicting and learning: a proof of concept applied to the dam systems, Adv. Eng. Inform. 52 (2022) 101551, https://doi.org/10.1016/j.aei.2022.101551.
[25] A. Hogan, E. Blomqvist, M. Cochez, C. d'Amato, G. de Melo, C. Gutierrez, J.E. L. Gayo, S. Kirrane, S. Neumaier, A. Polleres, R. Navigli, A.-C.-N. Ngomo, S. M. Rashid, A. Rula, L. Schmelzeisen, J. Sequeda, S. Staab, A. Zimmermann, Knowledge graphs, ACM Comput. Surv. 54 (2022) 1–37, https://doi.org/10.1145/3447772.
[26] L. Pei, Y. Li, X. Lu, J. Zhou, Y. Li, Ontology - and data-driven defect diagnosis with knowledge graphs and causal reasoning: Application to the risk management of gravity dams, Reliab. Eng. Syst. Saf. 270 (2026) 112224, https://doi.org/10.1016/j.ress.2026.112224.
[27] X. Bai, S. He, Y. Li, Y. Xie, X. Zhang, W. Du, J.-R. Li, Construction of a knowledge graph for framework material enabled by large language models and its application, npj Comput. Mater. 11 (2025) 51, https://doi.org/10.1038/s41524-025-01540-6.
[28] Y. Huang, Z. Zhang, H. Hu, Risk propagation mechanisms in railway systems under extreme weather: a knowledge graph-based unsupervised causation chain approach, Reliab. Eng. Syst. Saf. 260 (2025) 110976, https://doi.org/10.1016/j.ress.2025.110976.
[29] Y. Yang, P. Xiang, D. Wang, Knowledge graph and mitigation measures recommendation for safety hazards in large-scale hydropower projects using diverse heterogeneous inspection data, Autom. Constr. 178 (2025) 106419, https://doi.org/10.1016/j.autcon.2025.106419.
[30] O. Etzioni, M. Cafarella, D. Downey, A.-M. Popescu, T. Shaked, S. Soderland, D. S. Weld, A. Yates, Unsupervised named-entity extraction from the web: an experimental study, Artif. Intell. 165 (2005) 91–134, https://doi.org/10.1016/j.artint.2005.03.001.
[31] D. Hanisch, K. Fundel, H.-T. Mevissen, R. Zimmer, J. Fluck, ProMiner: Rule-based protein and gene entity recognition, BMC Bioinf. 6 (2005) S14, https://doi.org/10.1186/1471-2105-6-S1-S14.
[32] S. Zhang, N. Elhadad, Unsupervised biomedical named entity recognition: Experiments with clinical and biological texts, J. Biomed. Inform. 46 (2013) 1088–1098, https://doi.org/10.1016/j.jbi.2013.08.004.
[33] M. Gridach, Character-level neural network for biomedical named entity recognition, J. Biomed. Inform. 70 (2017) 85–91, https://doi.org/10.1016/j.jbi.2017.05.002.
[34] I. Jauregi Unanue, E. Zare Borzeshi, M. Piccardi, Recurrent neural networks with specialized word embeddings for health-domain named-entity recognition, J. Biomed. Inform. 76 (2017) 102–109, https://doi.org/10.1016/j.jbi.2017.11.007.
[35] T. Chen, R. Xu, Y. He, X. Wang, Improving sentiment analysis via sentence type classification using BiLSTM-CRF and CNN, Expert Syst. Appl. 72 (2017) 221–230, https://doi.org/10.1016/j.eswa.2016.10.065.
[36] Q. Li, L. Li, W. Wang, Q. Li, J. Zhong, A comprehensive exploration of semantic relation extraction via pre-trained CNNs, Knowl.-Based Syst. 194 (2020) 105488. https://doi.org/10.1016/j.knosys.2020.105488.
[37] J. Wang, W. Xu, X. Fu, G. Xu, Y. Wu, ASTRAL: Adversarial trained LSTM-CNN for named entity recognition, Knowl.-Based Syst. 197 (2020) 105842. https://doi.org/10.1016/j.knosys.2020.105842.
[38] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A.N. Gomez, L. Kaiser, I. Polosukhin, Attention is all you need, (2023). https://doi.org/10.48550/arXiv.1706.03762.
[39] J. Devlin, M.-W. Chang, K. Lee, K. Toutanova, BERT: Pre-training of deep bidirectional transformers for language understanding, (2019). https://doi.org/10.48550/arXiv.1810.04805.
[40] Y. Ding, F. Zhu, H. Li, A.K. Parlikad, M. Xie, A failure knowledge graph learning framework for offshore wind turbines with incomplete knowledge, Renew. Sustain. Energy Rev. 215 (2025) 115561, https://doi.org/10.1016/j.rser.2025.115561.
[41] Z. Zhang, X. Yang, L. Sun, Y. Sun, J. Kang, Research on constructing and reasoning the collision knowledge graph of autonomous navigation ship based on enhanced BERT model, Expert Syst. Appl. 278 (2025) 127429, https://doi.org/10.1016/j.eswa.2025.127429.
[42] Y. Hu, H. Wang, J. Chen, C. Zhang, M. Ren, M. Dong, H. Zhang, Z. Hu, X. Dong, Construction and application of conditional event-based knowledge graphs for electric power standards, Expert Syst. Appl. 297 (2026) 129291, https://doi.org/10.1016/j.eswa.2025.129291.
[43] X. Liu, J.A. Erkoyuncu, J.Y.H. Fuh, W.F. Lu, B. Li, Knowledge extraction for additive manufacturing process via named entity recognition with LLMs, Robot. Comput.-Integr. Manuf. 93 (2025) 102900, https://doi.org/10.1016/j.rcim.2024.102900.
[44] Inf. Process. Manag. 62 (2025) 104129, https://doi.org/10.1016/j.ipm.2025.104129.
[45] X. Liao, C. Chen, Z. Wang, Y. Liu, T. Wang, L. Cheng, Large language model assisted fine-grained knowledge graph construction for robotic fault diagnosis, Adv. Eng. Inform. 65 (2025) 103134, https://doi.org/10.1016/j.aei.2025.103134.
[46] Y. Huang, R. Yan, Z. Zhang, Automated knowledge extraction from marine accident reports using large language models: Graph construction and evaluation, Ocean Coast. Manag. 272 (2026) 108015, https://doi.org/10.1016/j.ocecoaman.2025.108015.
[47] M. Monajatipoor, J. Yang, J. Stremmel, M. Emami, F. Mohaghegh, M. Rouhsedaghat, K.-W. Chang, LLMs in biomedicine: A study on clinical named entity recognition, (2024). https://doi.org/10.48550/arXiv.2404.07376.
[48] J. Choi, B. Lee, Accelerating materials language processing with large language models, Commun. Mater. 5 (2024) 13, https://doi.org/10.1038/s43246-024-00449-9.
[49] D. Cotroneo, R. Natella, V. Orbinato, Elevating cyber threat intelligence against disinformation campaigns with LLM-based concept extraction and the FakeCTI dataset, J. Syst. Softw. 232 (2026) 112660, https://doi.org/10.1016/j.jss.2025.112660.
[50] M. Val-Calvo, M. Egaña Aranguren, J. Mulero-Hernández, G. Almagro-Hernández, P. Deshmukh, J.A. Bernabé-Díaz, P. Espinoza-Arias, J.L. Sánchez-Fernández, J. Mueller, J.T. Fernández-Breis, OntoGenix: Leveraging large language models for enhanced ontology engineering from datasets, Inf. Process. Manag. 62 (2025) 104042, https://doi.org/10.1016/j.ipm.2024.104042.
[51] G. Ciatto, A. Agiollo, M. Magnini, A. Omicini, Large language models as oracles for instantiating ontologies with domain-specific knowledge, Knowl.-Based Syst. 310 (2025) 112940, https://doi.org/10.1016/j.knosys.2024.112940.

메모 (p.15)

[52] L. Huang, W. Yu, W. Ma, W. Zhong, Z. Feng, H. Wang, Q. Chen, W. Peng, X. Feng, B. Qin, T. Liu, A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions, ACM Trans. Inf. Syst. 43 (2025) 1–55, https://doi.org/10.1145/3703155.
[53] J. Zhou, Z. Ma, Named entity recognition for construction documents based on fine-tuning of large language models with low-quality datasets, Autom. Constr. 174 (2025) 106151, https://doi.org/10.1016/j.autcon.2025.106151.
[54] Adv. Eng. Inform. 74 (2026) 104646, https://doi.org/10.1016/j.aei.2026.104646.
[55] F. Ali, S. El-Sappagh, S.M.R. Islam, A. Ali, M. Attique, M. Imran, K.-S. Kwak, An intelligent healthcare monitoring framework using wearable sensors and social networking data, Future Gener, Comput. Syst. 114 (2021) 23–43, https://doi.org/10.1016/j.future.2020.07.047.
[56] C. Cui, T. Sun, S. Liang, T. Gao, Z. Zhang, J. Liu, X. Wang, C. Zhou, H. Liu, M. Lin, Y. Zhang, Y. Zhang, H. Zheng, J. Zhang, J. Zhang, Y. Liu, D. Yu, Y. Ma, PaddleOCR-VL: Boosting multilingual document parsing via a 0.9B ultra-compact vision-language model, (2025). https://doi.org/10.48550/arXiv.2510.14528.
[57] E.J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, W. Chen, LoRA: Low-rank adaptation of large language models, (2021). https://doi.org/10.48550/arXiv.2106.09685.
[58] F. Ravat, J. Song, O. Teste, C. Trojahn, Efficient querying of multidimensional RDF data with aggregates: Comparing NoSQL, RDF and relational data stores, Int. J. Inf. Manag. 54 (2020) 102089, https://doi.org/10.1016/j.ijinfomgt.2020.102089.
[59] Y. Ma, S. Zheng, Z. Yang, P. Zheng, J. Leng, J. Hong, Aircraft assembly process planning based on knowledge graph constructed by integrating LLMs and SLMs, J. Manuf. Syst. 84 (2026) 1–19, https://doi.org/10.1016/j.jmsy.2025.11.016.
[60] W. Dou, D. Shen, X. Zhou, Y. Kou, T. Nie, H. Cui, G. Yu, Weakly-supervised entity matching via LLM-guided data augmentation and knowledge transfer, Knowl.-Based Syst. 335 (2026) 115238, https://doi.org/10.1016/j.knosys.2025.115238.
[61] N. Ding, Y. Chen, B. Xu, Y. Qin, Z. Zheng, S. Hu, Z. Liu, M. Sun, B. Zhou, Enhancing chat language models by scaling high-quality instructional conversations, (2023). https://doi.org/10.48550/arXiv.2305.14233.
[62] L. Prechelt, Early stopping — but when? in: G. Montavon, G.B. Orr, K.-.-R. Müller (Eds.), Neural Netw. Tricks Trade Springer, Berlin Heidelberg, Berlin, Heidelberg, 2012, pp. 53–67, https://doi.org/10.1007/978-3-642-35289-8_5.

메모 (p.16)